

ARMY RESEARCH LABORATORY




# A RASCAL In-Bore Dynamic Analysis of the Task B and Task C Electromagnetic Railguns

Lawrence W. Burton

ARL-TR-726

April 1995

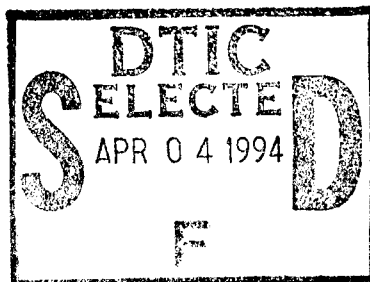

APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.

19950403 008

## **NOTICES**

Destroy this report when it is no longer needed. DO NOT return it to the originator.

Additional copies of this report may be obtained from the National Technical Information Service, U.S. Department of Commerce, 5285 Port Royal Road, Springfield, VA 22161.

The findings of this report are not to be construed as an official Department of the Army position, unless so designated by other authorized documents.

The use of trade names or manufacturers' names in this report does not constitute endorsement of any commercial product.

| REPORT DOCUMENTATION PAGE   |   |  | Form Approved<br>OMB No. 0704-0188                        |   |
|---|---|--|---|---|
| Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.  |   |  |   |   |
| 1. AGENCY USE ONLY (Leave blank)  |   | 2. REPORT DATE<br>April 1995                               |   | 3. REPORT TYPE AND DATES COVERED<br>August-September 1994 |
| 4. TITLE AND SUBTITLE<br>A RASCAL In-Bore Dynamic Analysis of the Task B and Task C Electromagnetic Railguns  |   |  | 5. FUNDING NUMBERS<br>PR: 1L162618AH80                    |   |
| 6. AUTHOR(S)<br>Lawrence W. Burton  |   |  |   |   |
| 7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)<br>U.S. Army Research Laboratory<br>ATTN: AMSRL-WT-PD<br>Aberdeen Proving Ground, MD 21005-5066  |   |  | 8. PERFORMING ORGANIZATION<br>REPORT NUMBER<br>ARL-TR-726 |   |
| 9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES)<br>U.S. Army Armament Research, Development, and Engineering Center<br>ATTN: SMCAR-FSE<br>Picatinny Arsenal, NJ 07806-5000  |   |  | 10. SPONSORING / MONITORING<br>AGENCY REPORT NUMBER       |   |
| 11. SUPPLEMENTARY NOTES   |   |  |   |   |
| 12a. DISTRIBUTION / AVAILABILITY STATEMENT<br>Approved for public release; distribution is unlimited.   |   |  | 12b. DISTRIBUTION CODE                                    |   |
| 13. ABSTRACT (Maximum 200 words)<br><p>Previous RASCAL in-bore gun dynamics analyses of 90-mm railguns have shown high transverse accelerations can be expected because of anomalies in the bore straightness. A request was made for similar analyses to be made for the Task B and Task C 90-mm railguns, with the Sabot Launched Electromagnetic Gun KE (SLEKE) II projectile design.</p> <p>Results of the RASCAL analyses showed the importance of matching the contact stiffness of the rear and front bore riders of the SLEKE II designs. Numerous cases were run to show the effects of variations in contact stiffness. Mismatched contact stiffnesses resulted in elevated transverse accelerations at the less stiff of the two bore riding contacts.</p> <p>Comparisons of the results of this work are made against previous RASCAL analyses. These results verify the effect a kink in the bore centerline profile has on the projectile's in-bore response.</p> |   |  |   |   |
| 14. SUBJECT TERMS<br>transverse loadings, electromagnetic railguns, in-bore gun dynamics  |   |  | 15. NUMBER OF PAGES<br>68                                 |   |
|   |   |  | 16. PRICE CODE  |   |
| 17. SECURITY CLASSIFICATION<br>OF REPORT<br>UNCLASSIFIED  | 18. SECURITY CLASSIFICATION<br>OF THIS PAGE<br>UNCLASSIFIED | 19. SECURITY CLASSIFICATION<br>OF ABSTRACT<br>UNCLASSIFIED | 20. LIMITATION OF ABSTRACT<br>UL                          |   |

INTENTIONALLY LEFT BLANK.

# TABLE OF CONTENTS

|   | <u>Page</u> |
|---|-------------|
| LIST OF FIGURES .....   | v           |
| LIST OF TABLES .....  | ix          |
| 1. INTRODUCTION .....   | 1           |
| 2. IN-BORE DYNAMICS MODEL .....   | 2           |
| 2.1 Gun System Models .....   | 2           |
| 2.2 Barrel Geometry Models .....  | 5           |
| 2.3 Bore Centerline Profiles .....  | 5           |
| 2.4 Interior Ballistic Profile .....  | 6           |
| 2.5 Projectile Geometry .....   | 6           |
| 3. RESULTS .....  | 10          |
| 3.1 Task B Gun .....  | 12          |
| 3.2 Task C Gun .....  | 13          |
| 4. CONCLUSIONS .....  | 16          |
| 5. REFERENCES .....   | 19          |
| APPENDIX A: LISTING OF RASCAL INPUT FILES FOR THE TASK B AND<br>TASK C GUNS ..... | 21          |
| APPENDIX B: TRANSVERSE ACCELERATION PLOTS FOR TASK B GUN ...                      | 29          |
| APPENDIX C: ANGULAR ACCELERATION PLOTS FOR TASK B GUN .....                       | 39          |
| APPENDIX D: TRANSVERSE ACCELERATION PLOTS FOR TASK C GUN ...                      | 49          |
| APPENDIX E: ANGULAR ACCELERATION PLOTS FOR TASK C GUN .....                       | 59          |
| DISTRIBUTION LIST .....   | 69          |

|                     |                                     |
|---------------------|-------------------------------------|
| Accession For       |                                     |
| NTIS CRA&I          | <input checked="" type="checkbox"/> |
| DTIC TAB            | <input type="checkbox"/>            |
| Unannounced         | <input type="checkbox"/>            |
| Justification ..... |                                     |
| By .....            |                                     |
| Distribution /      |                                     |
| Availability Codes  |                                     |
| Dist                | Avail and/or Special                |
| A-1                 |                                     |

INTENTIONALLY LEFT BLANK.

## LIST OF FIGURES

| <u>Figure</u>  | <u>Page</u> |
|--|-------------|
| 1. Schematic of Task C gun barrel . . . . .  | 3           |
| 2. Annular representation of Task C barrel for RASCAL analysis . . . . .   | 4           |
| 3. Measured bore centerline profile of the Task B gun . . . . .  | 5           |
| 4. Measured bore centerline profile of the Task C gun . . . . .  | 6           |
| 5. Interior ballistic load profile of the Task B gun . . . . .   | 7           |
| 6. Interior ballistic load profile of the Task C gun . . . . .   | 7           |
| 7. SLEKE II projectile configuration . . . . .   | 8           |
| 8. Finite element wedge representation of SLEKE II armature . . . . .  | 8           |
| 9. Finite element model of quadrilateral block . . . . .   | 9           |
| 10. RASCAL geometry model of the SLEKE II projectile . . . . .   | 9           |
| 11. Example plot of RASCAL's transverse acceleration prediction . . . . .  | 11          |
| 12. Example plot of RASCAL's angular acceleration prediction . . . . .   | 11          |
| 13. Rear contact transverse acceleration for case 5 conditions with the Task B gun - rail centerline profile . . . . . | 14          |
| 14. Projectile position vs. time in Task B gun . . . . .   | 14          |
| B-1. Case 1 transverse acceleration from Task B gun - rail centerline . . . . .  | 31          |
| B-2. Case 2 transverse acceleration from Task B gun - rail centerline . . . . .  | 31          |
| B-3. Case 3 transverse acceleration from Task B gun - rail centerline . . . . .  | 32          |
| B-4. Case 4 transverse acceleration from Task B gun - rail centerline . . . . .  | 32          |
| B-5. Case 5 transverse acceleration from Task B gun - rail centerline . . . . .  | 32          |
| B-6. Case 6 transverse acceleration from Task B gun - rail centerline . . . . .  | 33          |
| B-7. Case 7 transverse acceleration from Task B gun - rail centerline . . . . .  | 34          |
| B-8. Case 1 transverse acceleration from Task B gun insulator centerline . . . . .                                     | 34          |

| <u>Figure</u>   | <u>Page</u> |
|---|-------------|
| B-9. Case 2 transverse acceleration from Task B gun insulator centerline . . . . .  | 35          |
| B-10. Case 3 transverse acceleration from Task B gun insulator centerline . . . . . | 35          |
| B-11. Case 4 transverse acceleration from Task B gun insulator centerline . . . . . | 36          |
| B-12. Case 5 transverse acceleration from Task B gun insulator centerline . . . . . | 36          |
| B-13. Case 6 transverse acceleration from Task B gun insulator centerline . . . . . | 37          |
| B-14. Case 7 transverse acceleration from Task B gun insulator centerline . . . . . | 37          |
| C-1. Case 1 angular acceleration from Task B gun - rail centerline . . . . .        | 41          |
| C-2. Case 2 angular acceleration from Task B gun - rail centerline . . . . .        | 41          |
| C-3. Case 3 angular acceleration from Task B gun - rail centerline . . . . .        | 42          |
| C-4. Case 4 angular acceleration from Task B gun - rail centerline . . . . .        | 42          |
| C-5. Case 5 angular acceleration from Task B gun - rail centerline . . . . .        | 43          |
| C-6. Case 6 angular acceleration from Task B gun - rail centerline . . . . .        | 43          |
| C-7. Case 7 angular acceleration from Task B gun - rail centerline . . . . .        | 44          |
| C-8. Case 1 angular acceleration from Task B gun insulator centerline . . . . .     | 44          |
| C-9. Case 2 angular acceleration from Task B gun insulator centerline . . . . .     | 45          |
| C-10. Case 3 angular acceleration from Task B gun insulator centerline . . . . .    | 45          |
| C-11. Case 4 angular acceleration from Task B gun insulator centerline . . . . .    | 46          |
| C-12. Case 5 angular acceleration from Task B gun insulator centerline . . . . .    | 46          |
| C-13. Case 6 angular acceleration from Task B gun insulator centerline . . . . .    | 47          |
| C-14. Case 7 angular acceleration from Task B gun insulator centerline . . . . .    | 47          |
| D-1. Case 1 transverse acceleration from Task C gun - rail centerline . . . . .     | 51          |
| D-2. Case 2 transverse acceleration from Task C gun - rail centerline . . . . .     | 51          |
| D-3. Case 3 transverse acceleration from Task C gun - rail centerline . . . . .     | 52          |
| D-4. Case 4 transverse acceleration from Task C gun - rail centerline . . . . .     | 52          |



| <u>Figure</u>   | <u>Page</u> |
|---|-------------|
| D-5. Case 5 transverse acceleration from Task C gun - rail centerline . . . . .     | 53          |
| D-6. Case 6 transverse acceleration from Task C gun - rail centerline . . . . .     | 53          |
| D-7. Case 7 transverse acceleration from Task C gun - rail centerline . . . . .     | 54          |
| D-8. Case 1 transverse acceleration from Task C gun insulator centerline . . . . .  | 54          |
| D-9. Case 2 transverse acceleration from Task C gun insulator centerline . . . . .  | 55          |
| D-10. Case 3 transverse acceleration from Task C gun insulator centerline . . . . . | 55          |
| D-11. Case 4 transverse acceleration from Task C gun insulator centerline . . . . . | 56          |
| D-12. Case 5 transverse acceleration from Task C gun insulator centerline . . . . . | 56          |
| D-13. Case 6 transverse acceleration from Task C gun insulator centerline . . . . . | 57          |
| D-14. Case 7 transverse acceleration from Task C gun insulator centerline . . . . . | 57          |
| E-1. Case 1 angular acceleration from Task C gun - rail centerline . . . . .        | 61          |
| E-2. Case 2 angular acceleration from Task C gun - rail centerline . . . . .        | 61          |
| E-3. Case 3 angular acceleration from Task C gun - rail centerline . . . . .        | 62          |
| E-4. Case 4 angular acceleration from Task C gun - rail centerline . . . . .        | 62          |
| E-5. Case 5 angular acceleration from Task C gun - rail centerline . . . . .        | 63          |
| E-6. Case 6 angular acceleration from Task C gun - rail centerline . . . . .        | 63          |
| E-7. Case 7 angular acceleration from Task C gun - rail centerline . . . . .        | 64          |
| E-8. Case 1 angular acceleration from Task C gun insulator centerline . . . . .     | 64          |
| E-9. Case 2 angular acceleration from Task C gun insulator centerline . . . . .     | 65          |
| E-10. Case 3 angular acceleration from Task C gun insulator centerline . . . . .    | 65          |
| E-11. Case 4 angular acceleration from Task C gun insulator centerline . . . . .    | 66          |
| E-12. Case 5 angular acceleration from Task C gun insulator centerline . . . . .    | 66          |
| E-13. Case 6 angular acceleration from Task C gun insulator centerline . . . . .    | 67          |
| E-14. Case 7 angular acceleration from Task C gun insulator centerline . . . . .    | 67          |

INTENTIONALLY LEFT BLANK.

## LIST OF TABLES

| <u>Table</u>  | <u>Page</u> |
|---|-------------|
| 1. Physical and Material Properties of Task C Barrel .....  | 4           |
| 2. Rear and Front Contact Stiffness Values .....  | 10          |
| 3. Maximum Projectile Transverse Accelerations Through the Rail Centerline Profile<br>of the Task B Railgun .....                                 | 13          |
| 4. Maximum Projectile Transverse Accelerations Through the Insulator Centerline<br>Profile of the Task B Railgun .....                            | 13          |
| 5. Maximum Projectile Transverse Accelerations Through the Rail Centerline Profile<br>of the Task C Railgun .....                                 | 15          |
| 6. Maximum Projectile Transverse Accelerations Through the Insulator Centerline<br>Profile of the Task C Railgun .....                            | 15          |
| 7. Maximum Projectile Transverse Accelerations Through the Rail Centerline Profile<br>of the Task C Railgun With Task B Gun Launch Velocity ..... | 16          |

INTENTIONALLY LEFT BLANK.

## 1. INTRODUCTION

Electromagnetic (EM) gun projectile designers have spent much time and effort over the past five years to design robust, large caliber, kinetic energy (KE) projectiles. The effort has focused on ensuring structural integrity of the sabot and armature during the in-bore launch cycle. These efforts have paid dividends and resulted in successful launches from 90-mm EM railguns under the auspices of the Sabot Launched Electromagnetic Gun KE (SLEKE) projectile program (Statton, Alexander, and Dethlefsen 1995). While these high-energy test firings have been successful in the sense that a projectile exited the muzzle intact, there has been little experimental effort dedicated to the accuracy issues associated with EM launchers.

Recently, analytical work has been done comparing the in-bore dynamic behavior of projectiles in an EM railgun and a conventional powder cannon (Burton 1993). This work revealed that the bore centerline profiles, typical in state-of-the-art railguns, impart much higher transverse force loading to the projectile than currently found in conventional guns. The calculated lateral acceleration loading in the EM railgun was found to be as much as 10 times that of the conventional gun.

A standard approach used by EM projectile designers is to proof fire their design configurations in conventional powder guns at pressures which produce equivalent maximum axial accelerations and loading rise times as those expected for the intended EM launch. Kaman Sciences Corporation's Rodman cone projectile design was tested in this manner and was successfully launched at the U.S. Army Combat Systems Test Activity (CSTA) at Aberdeen Proving Ground, MD (Statton, Alexander, and Dethlefsen 1995). When this projectile was subsequently launched from the 90-mm railgun at Maxwell Laboratories, there were unexpected in-bore failures.

As a consequence of these failures, an in-bore dynamics analysis was made and it was found that large lateral disturbances were initiated at a "kink" present in the railgun profile (Burton 1995). While this work did not calculate stresses through the projectile body, it did show that high transverse forces were present which were not accounted for in the preliminary finite element (FE) analysis of the design nor present in the conventional gun test firings.

Results of the various in-bore dynamic analysis of EM railguns has highlighted the importance of maintaining a bore centerline profile which does not exhibit large and rapid deviations over the length of

the barrel. Taking centerline measurements has become a standard practice within the EM gun community, and their use with in-bore dynamics models has become more prevalent.

The SLEKE program manager requested that such an in-bore analysis be performed for Kaman Science Corporation's SLEKE II, long-rod, KE projectile design. The investigation was to examine the transverse loading encountered by this projectile when launched from the Task B and Task C 90-mm railguns. This report details this analytical investigation and reports its findings.

## 2. IN-BORE DYNAMICS MODEL

There are several models and techniques available for modeling the in-bore dynamic interaction between a projectile and gun tube (Hopkins 1990; Rabern and Bannister 1990; Wilkerson 1993). Previous analysis of EM in-bore dynamic response (Burton 1994b) had been made with the Little RASCAL code (Erline and Kregel 1990), which is a quasi-2-dimensional beam element model, and was again the model of choice for this investigation.

The RASCAL dynamics code has five basic input requirements which are as follows: 1) a gun system model, 2) a general barrel geometry configuration, 3) a gun bore centerline profile, 4) an interior ballistic profile, and 5) a projectile geometry description. The specific parameters for both the Task B and Task C railguns are given in the following sections.

**2.1 Gun System Models.** The Task B railgun is an experimental 90-mm launcher located at the University of Texas Center for Electromechanics (UT-CEM). One of the principal inputs required for the gun system model is the gun stiffness elastic modulus. While this value is readily available for conventional guns with homogeneous cross-sections, calculations are required for the laminated barrel cross-section characteristic of an EM railgun.

Previous work (Burton 1993) determined that the longitudinal elastic modulus of the gun barrel required by the RASCAL model can be calculated for an EM railgun by assuming the barrel to be a composite beam. The resulting equation to calculate the elastic modulus is rewritten here:

$$E_{TOT} I_{TOT} = E_1 I_1 + E_2 I_2 + E_3 I_3 \quad (1)$$

$E_{TOT}$  represents the effective modulus of the gun barrel for the RASCAL model.  $I_{TOT}$  is the gun barrel's moment of inertia.  $E_1$ ,  $E_2$ , and  $E_3$  are the modulus values for each of the material regions that make up the composite gun barrel, while  $I_1$ ,  $I_2$ , and  $I_3$  are the moments of inertia associated with each of these regions. The Task B modulus of  $35.4 \times 10^6$  psi ( $2.44 \times 10^5$  MPa) has been reported previously (Burton 1993) and was adopted for this study for both the rail and insulator centerline cases.

A schematic of the Task C gun barrel is shown in Figure 1. To simplify the calculations, assumptions were adopted which resulted in the barrel being modeled as a series of nested annuli as shown in Figure 2. This assumption has little affect on the magnitude of the transverse accelerations of interest in this study. Values as small as 25% of the calculated stiffness adopted were used to make calculations with the magnitude of the transverse accelerations differing by only about 1% from those reported here. The dimensions, material moduli, and calculated moments of inertia are given for both the rail and insulator planes in Table 1. Incorporating these values into equation 1 yields an effective longitudinal modulus of  $25.3 \times 10^6$  psi ( $1.74 \times 10^5$  MPa) in the rail plane and  $27.1 \times 10^6$  psi ( $1.87 \times 10^5$  MPa) in the insulator plane.

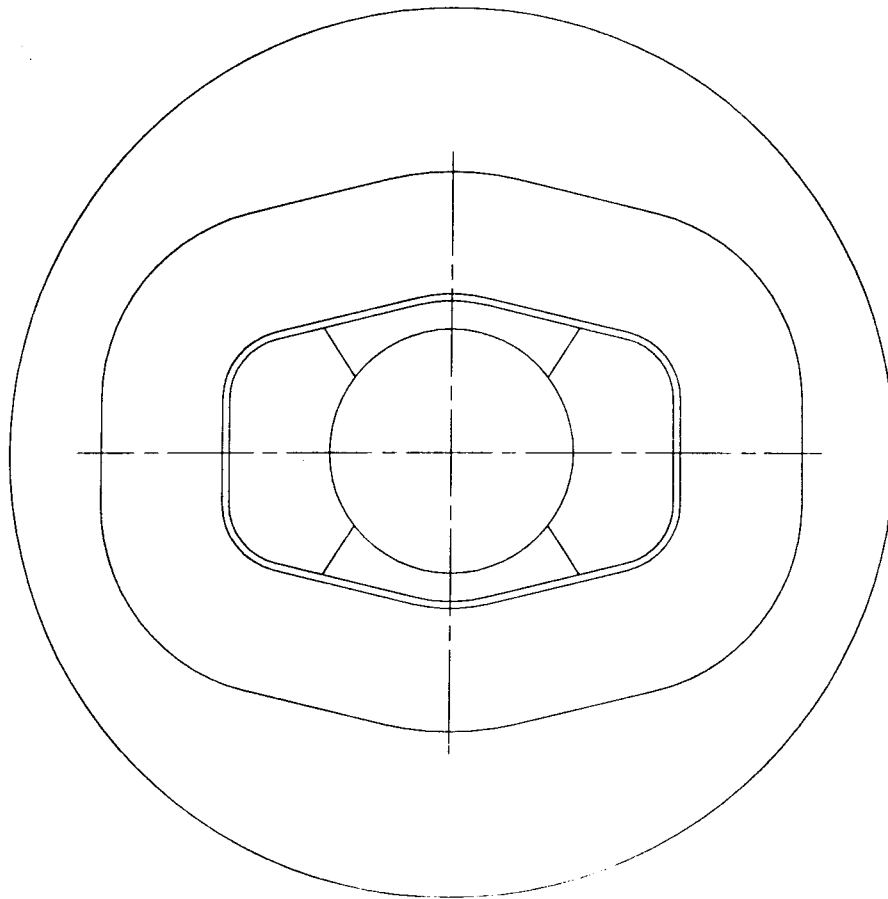


Figure 1. Schematic of Task C gun barrel.

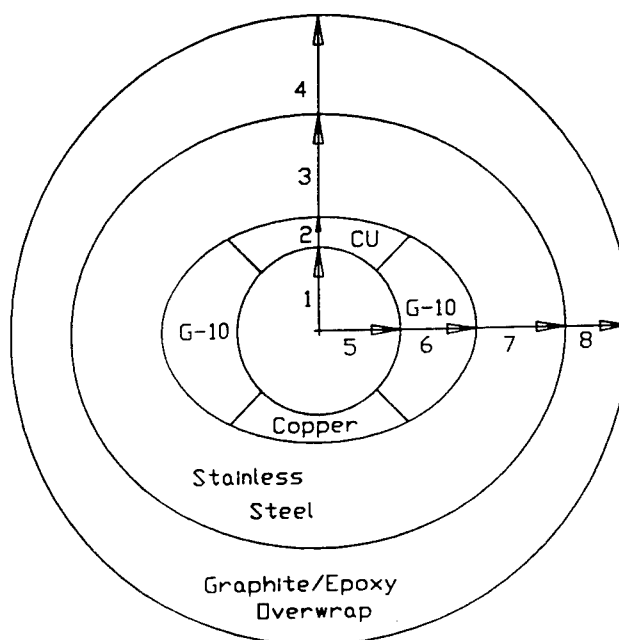


Figure 2. Annular representation of Task C barrel for RASCAL analysis.

Table 1. Physical and Material Properties of Task C Barrel

| Radius No. | Radius (in) | Material                | Material Modulus (PSI) | Moment of Inertia (in <sup>4</sup> ) |
|------------|-------------|-------------------------|------------------------|--------------------------------------|
| 1          | 1.77        | —(bore)                 | 0                      | 7.74                                 |
| 2          | 2.25        | copper                  | $19 \times 10^6$       | 20.13                                |
| 3          | 4.0         | stainless steel         | $27.6 \times 10^6$     | 201.06                               |
| 4          | 6.35        | graphite/epoxy overwrap | $25.0 \times 10^6$     | 1,276.98                             |
| 5          | 1.77        | —(bore)                 | 0                      | 7.74                                 |
| 6          | 3.293       | G-10 ceramic            | $44.0 \times 10^6$     | 92.35                                |
| 7          | 5.043       | stainless steel         | $27.6 \times 10^6$     | 507.97                               |
| 8          | 6.35        | graphite/epoxy overwrap | $25.0 \times 10^6$     | 1,276.98                             |

The RASCAL data input files used for the Task B and Task C gun system models are given in Appendix A.



2.2 Barrel Geometry Models. Both Task B and Task C guns have nominal bore diameters of 90 mm. From the bore centerline measurements made by CSTA, it was found that the length of the Task C gun, 280 in (7.11 m), is 21% less than the measured length of the Task B gun, 354 in (8.99 m). The RASCAL data input for the barrel geometry models is included in Appendix A.

2.3 Bore Centerline Profiles. Measurements were taken of the bore centerline profiles for both the Task B and Task C guns. The measurement technique was developed by CSTA (Weddle 1986) and has been used extensively to measure conventional powder guns, as well as EM railguns. Basically, the measurements are made by first establishing a line of sight (LOS) from the breech to the muzzle of the barrel. A circular target is then pulled through the barrel with deviations of the target center from the LOS centerline recorded at regular intervals over the entire length of travel.

The measured bore centerline profiles for the Task B and Task C barrels are shown in Figures 3 and 4, respectively. Note that two centerline measurements are required to fully characterize a barrel—in this case, one along the plane of the copper rails and the other along the ceramic insulator plane. The actual measured data values can be seen in Appendix A, where they are compiled in the listing of the RASCAL bore centerline input file. All calculations were made assuming no gravity droop. This is truly representative of the Task B gun which is mounted vertically. Removing gravity from the Task C calculation was done to allow for a direct comparison with the Task B barrel.

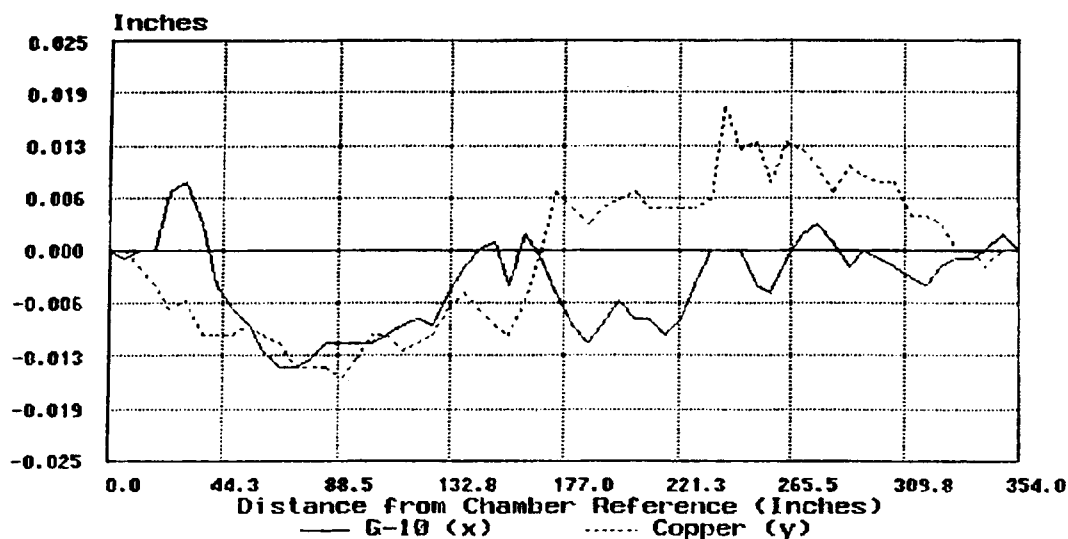


Figure 3. Measured bore centerline profile of the Task B gun.

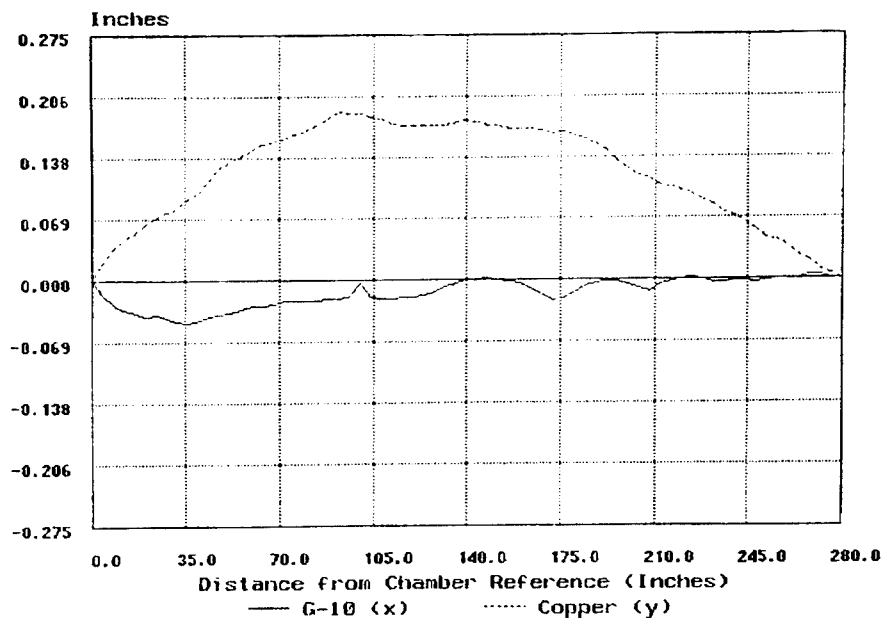


Figure 4. Measured bore centerline profile of the Task C gun.

2.4 Interior Ballistic Profile. The RASCAL code requires a driving force function to simulate the in-bore dynamic motion of the projectile as it travels the length of the barrel. This is accomplished with a velocity vs. time input file. Figure 5 depicts the velocity profile used for the Task B analyses. This profile is a predicted performance based on a UT-CEM simulation. The estimated muzzle velocity is 2,042 m/s (6,700 ft/s). Similar data was also supplied by UT-CEM for the Task C gun and is shown in Figure 6. The Task C gun muzzle velocity was projected to be 1,062 m/s (3,484 ft/s) for a launch of the SLEKE II projectile. The RASCAL input files of the interior ballistic loadings for the two gun systems are listed in Appendix A.

2.5 Projectile Geometry. The RASCAL gun dynamics code was written for axisymmetric, double-ramped sabot, KE rounds. The SLEKE II projectile of interest in this study has a swept-back, nonaxisymmetric, trailing rear armature, as shown by the schematic in Figure 7. Such an armature configuration is somewhat typical of today's KE EM projectiles and requires modifications and assumptions to be made when developing a RASCAL geometry model. One technique used in the past was to ignore the overhanging structure of the armature and use the standard RASCAL geometry modeler incorporated in the code (Burton 1993). This very simple modification does not, however, account for some of the lateral stiffness which the armature trailing arm provides to the projectile structure. A second approach, used previously, bypassed the RASCAL geometry modeler completely. For this method, a projectile was divided into 30 regions or elements of equal length with hand calculations then made for the mass and moment of inertia of each individual element (Burton 1994b). While providing a more accurate representation of the projectile, this technique proved to be a rather labor intensive process.

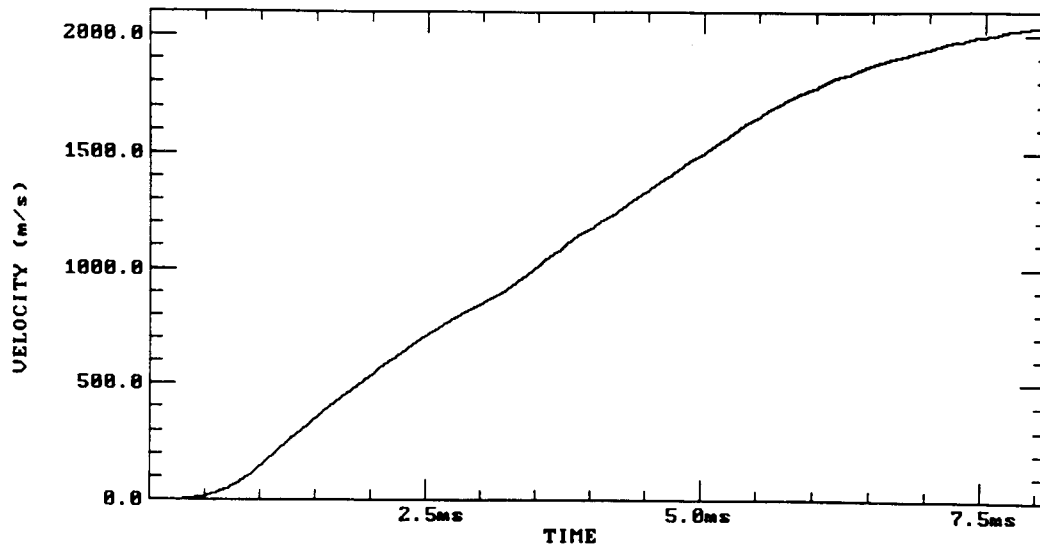


Figure 5. Interior ballistic load profile of the Task B gun.

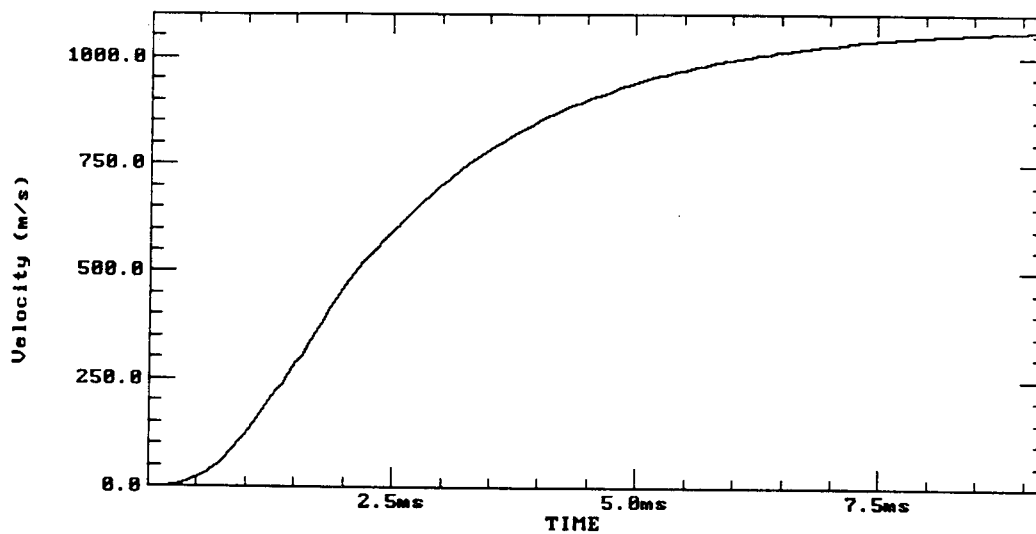


Figure 6. Interior ballistic load profile of the Task C gun.

Therefore, a new method of modeling the armature was incorporated for this study. First, a finite element representation of the overhanging armature was made and is shown as a wedge in Figure 8. A uniform pressure of 1,000 lb (4,448 N) was then placed on the top surface of the wedge, and the displacement of the line halfway up the underside of the wedge was noted. Then a quadrilateral block half the length of the wedge (see Figure 9) was sized such that its deflection under the same uniform

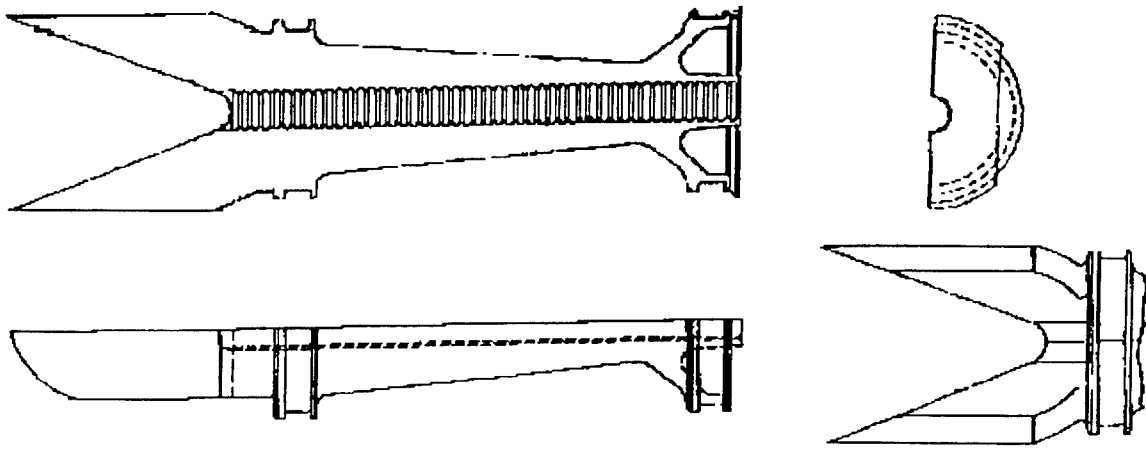


Figure 7. SLEKE II projectile configuration.

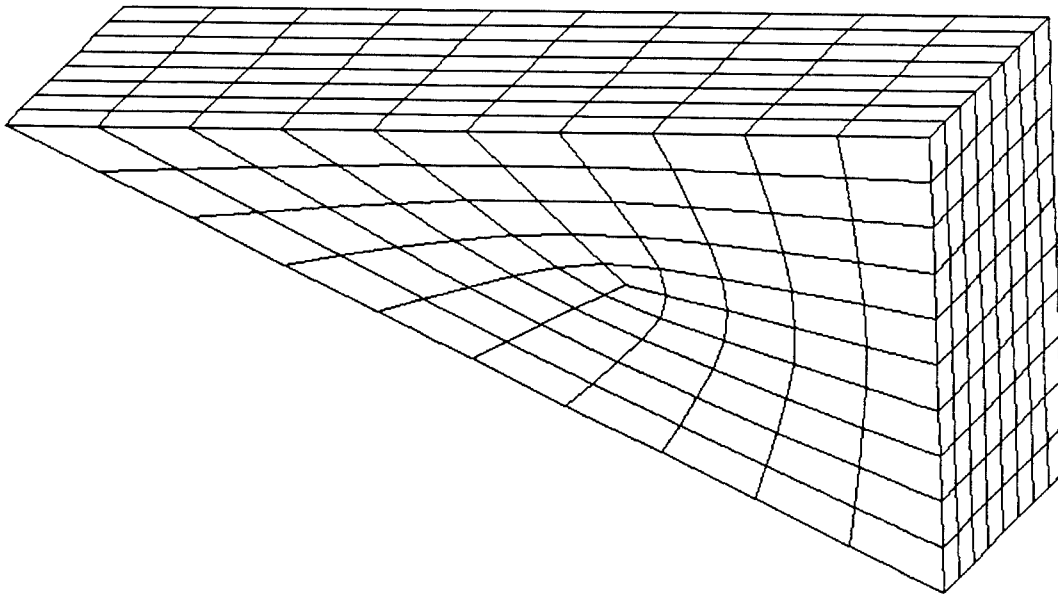


Figure 8. Finite element wedge representation of SLEKE II armature.

1,000-lb load was equal to that of the wedge's midsection. This was an attempt to match the stiffness of the two geometries. The reason for using a block to replace the wedge geometry is that this shape can be represented in RASCAL with no modification to the geometry modeler required. An outline of the

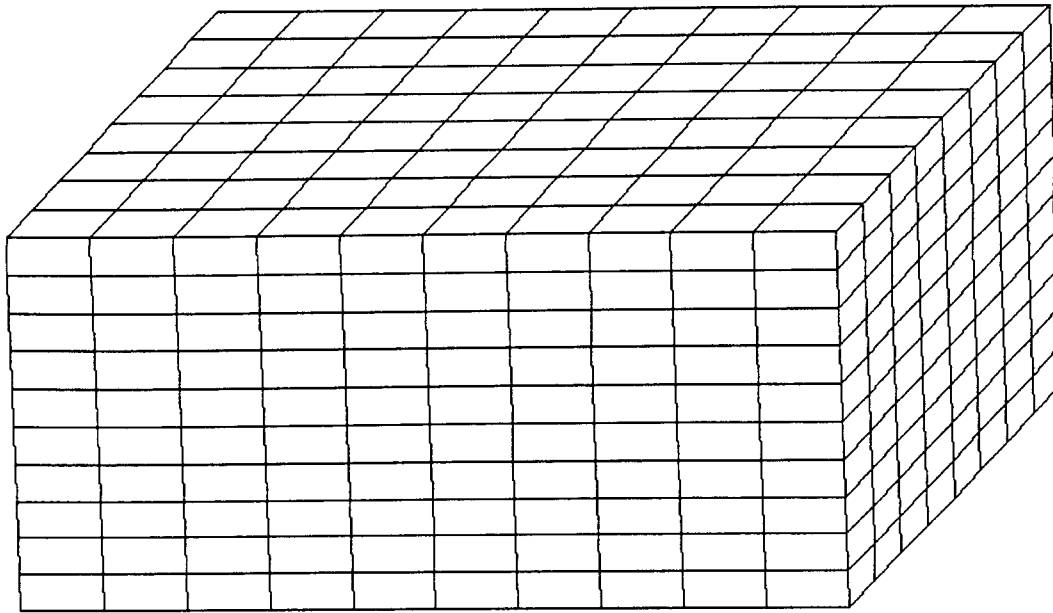


Figure 9. Finite element model of quadrilateral block.

SLEKE II projectile shape for input into RASCAL is shown in Figure 10, with the RASCAL input file provided in Appendix A. A closer approximation could be made by matching the wedge and block displacements at several locations, but at the expense of being a more time-consuming procedure.

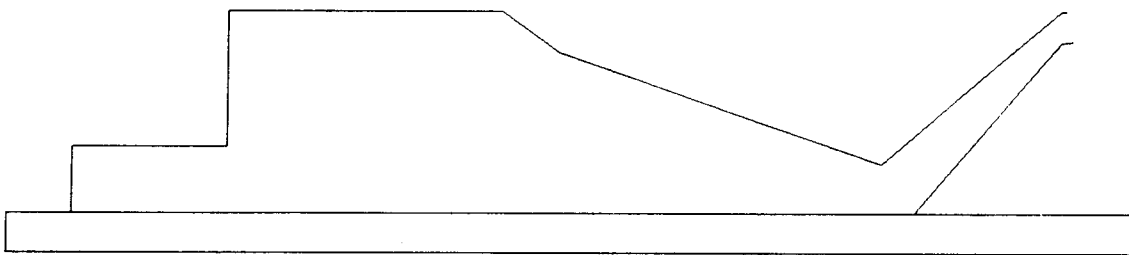


Figure 10. RASCAL geometry model of the SLEKE II projectile.

The other important input parameter for the RASCAL projectile model is the choice of contact stiffness values which greatly influence the dynamic interaction between the projectile and gun barrel (Erline 1991). A variety of combinations were employed for this study and are tabulated in Table 2. The values for cases 1, 2, and 6 were chosen to be consistent with previous analysis done of the Single Shot Gun (SSG) at Green Farm (Burton 1994a). Previous deflection measurements made, as part of the Cannon-Caliber Electromagnetic Gun (CCEMG) program, of an armature with a configuration similar to that of the SLEKE II projectile resulted in a stiffness value of  $4.3 \times 10^6$  lb/in ( $7.53 \times 10^8$  N/m). This value was used for the rear stiffness in cases 3, 4, and 5. The front borerider shape of the SLEKE II is similar to the M829A1 tank round, whose force-deflection measurements had also been made previously (Lyon 1994). The corresponding values for the front contact stiffness of cases 3, 4, and 5 are taken from Lyon's work with the differences in value a consequence of the curve fitting assumptions made for the force vs. deflection data. Case 7 was made part of the investigative matrix to see what effects a more compliant front borerider, in comparison to its rear contact, has on the transverse forces encountered.

Table 2. Rear and Front Contact Stiffness Values

| Case No. | Rear Contact Stiffness<br>(lb/in) | Front Contact Stiffness<br>(lb/in) |
|----------|-----------------------------------|------------------------------------|
| 1        | $1.0 \times 10^5$                 | $1.0 \times 10^5$                  |
| 2        | $4.3 \times 10^5$                 | $4.3 \times 10^5$                  |
| 3        | $4.3 \times 10^5$                 | $6.1 \times 10^5$                  |
| 4        | $4.3 \times 10^5$                 | $8.6 \times 10^5$                  |
| 5        | $4.3 \times 10^5$                 | $1.0 \times 10^6$                  |
| 6        | $1.0 \times 10^6$                 | $1.0 \times 10^6$                  |
| 7        | $1.0 \times 10^6$                 | $4.3 \times 10^5$                  |

### 3. RESULTS

Four sets of RASCAL runs were made using the SLEKE II projectile. The four runs considered the in-bore dynamics of the insulator and rail centerline profiles of both the Task B and Task C guns. The RASCAL output utilized was the beam element velocity data and the angular rate motion of the two contacts. A derivative of time was taken for each value of the beam element velocity data to give a

transverse acceleration of the projectile body. The transverse accelerations at the front and rear contacts and the projectile center of gravity were then extracted. An example plot of the transverse acceleration data is shown in Figure 11. Note that muzzle exit occurs at 8.0 ms so any plotted data beyond that point is extraneous. Similarly, plots of the angular acceleration of the projectile were produced for each case with an example shown in Figure 12.

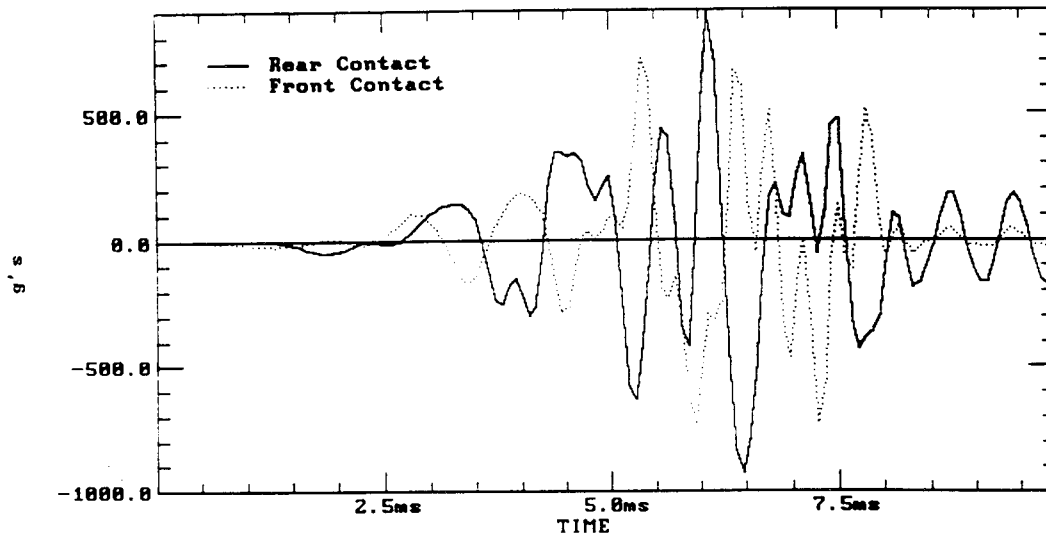


Figure 11. Example plot of RASCAL's transverse acceleration prediction.

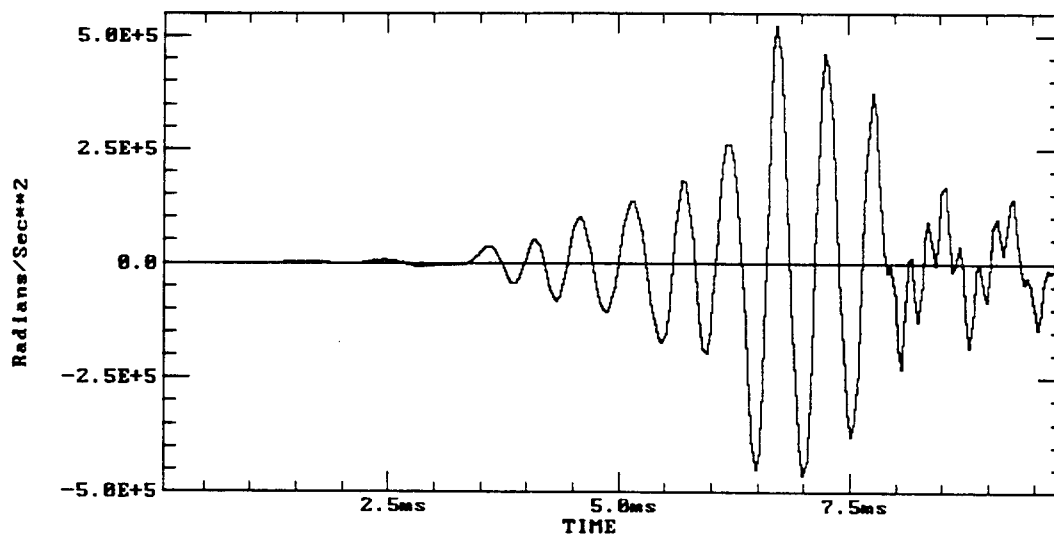


Figure 12. Example plot of RASCAL's angular acceleration prediction.

3.1 Task B Gun. Transverse acceleration plots for the front and rear contacts are given for each of the cases in Appendix B. Likewise, angular acceleration plots of each case are found in Appendix C. For each data run, the maximum transverse acceleration of the front and rear contacts and the projectile center of gravity were found. Tables 3 and 4 list these maximum acceleration values for the Task B rail and insulator profiles, respectively.

A direct comparison with the 90-mm SSG railgun is available for cases 1, 2, and 6 from previous work (Burton 1994a). The transverse accelerations from Task B are reduced by at least 20% from the previous study results. It has been shown previously (Burton 1995) that the centerline profile is the primary driver in determining the magnitude of the transverse acceleration. Thus, although the projectile geometries differ, it is safe to conclude that an improvement in the projectile response of this magnitude is a result of the Task B gun being more benign than the SSG.

Another interesting artifact of the data from the Task B analysis cases is that the importance of stiffness matching at the contacts, for a projectile of this design, is made clear. From Table 3, there are two examples that establish this phenomena. Starting with case 2, which has equal front and rear contact stiffnesses, as the front borerider contact is stiffened, the transverse acceleration at the rear is increased by as much as 60%. The physical explanation resides primarily in the design of the SLEKE II projectile which has its bore contacts at the ends of the projectile, away from the projectile center of gravity. Thus, as a contact is stiffened (in cases 2-5, the front), we are in effect clamping the projectile more tightly in place at one end which produces a cantilever vibrational effect. As transverse forces are imparted to the projectile, the clamped front end remains relatively fixed while the rear fishtails. We see this phenomena again in going from case 6 to case 7, where, as the front contact stiffness is reduced, this newly "unclamped" end has a 68% increase in transverse acceleration.

Figure 13 shows a plot of the rear contact transverse acceleration for case 5. Note that the high transverse accelerations are initiated just after 5.0 ms. This is representative of the other Task B gun transverse acceleration plots, which are provided in Appendix B. By integrating the Task B velocity vs. time curve in Figure 5, the projectile in-bore position as a function of time is obtained and is plotted in Figure 14. This plot shows that after 5.0 ms the projectile has traveled a little more than 4.0 m (157 in). A look back at the Task B centerline profiles in Figure 3 shows this location, 157 in, to be in the region of a kink in both the rails and insulators. The problems associated with kinked rail centerlines have been presented before (Burton 1995), and this provides further evidence supporting the importance of a relatively straight bore profile.



**Table 3. Maximum Projectile Transverse Accelerations Through the Rail Centerline Profile of the Task B Railgun**

| Case No. | Maximum Transverse Acceleration<br>(g's) |                   |               |
|----------|--|-------------------|---------------|
|          | Rear Contact                             | Center of Gravity | Front Contact |
| 1        | 927                                      | 553               | 736           |
| 2        | 7,706                                    | 3,224             | 5,451         |
| 3        | 10,295                                   | 4,621             | 5,524         |
| 4        | 12,325                                   | 5,857             | 7,302         |
| 5        | 11,959                                   | 6,337             | 8,111         |
| 6        | 7,617                                    | 3,436             | 4,959         |
| 7        | 7,680                                    | 3,585             | 8,308         |

**Table 4. Maximum Projectile Transverse Accelerations Through the Insulator Centerline Profile of the Task B Railgun**

| Case No. | Maximum Transverse Acceleration<br>(g's) |                   |               |
|----------|--|-------------------|---------------|
|          | Rear Contact                             | Center of Gravity | Front Contact |
| 1        | 2,038                                    | 904               | 1,180         |
| 2        | 4,835                                    | 2,379             | 3,487         |
| 3        | 7,105                                    | 2,811             | 3,583         |
| 4        | 11,113                                   | 4,825             | 5,113         |
| 5        | 12,838                                   | 5,866             | 6,388         |
| 6        | 9,230                                    | 3,771             | 7,396         |
| 7        | 9,182                                    | 2,732             | 10,010        |

**3.2 Task C Gun.** Like the Task B gun analysis, the Task C cases extracted plots of the transverse and angular accelerations which are given for the front and rear contacts of each case in Appendices D and E, respectively. The maximum transverse acceleration values for the rail and insulator centerline profiles are given in Tables 5 and 6, respectively.

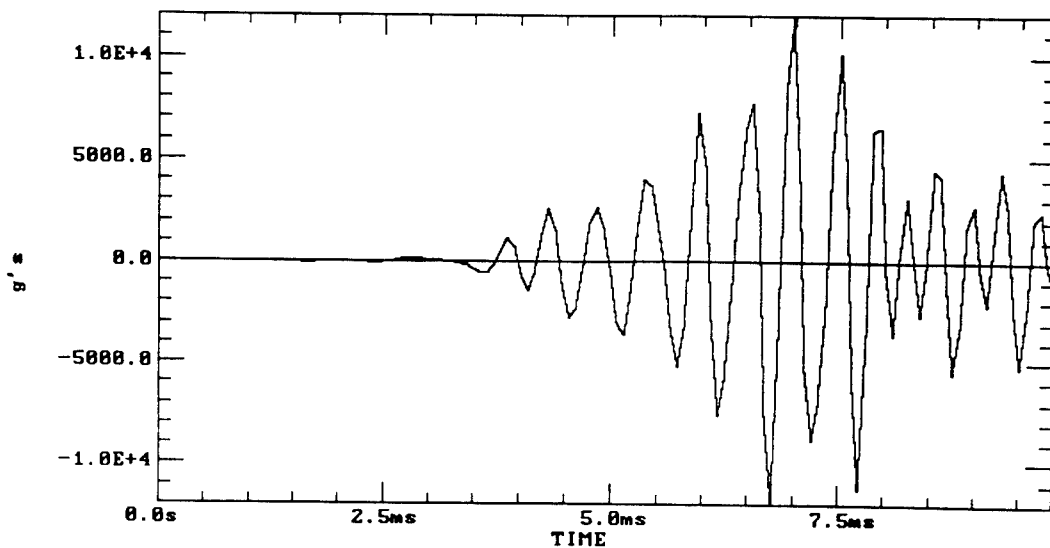


Figure 13. Rear contact transverse acceleration for case 5 conditions with the Task B gun - rail centerline profile.

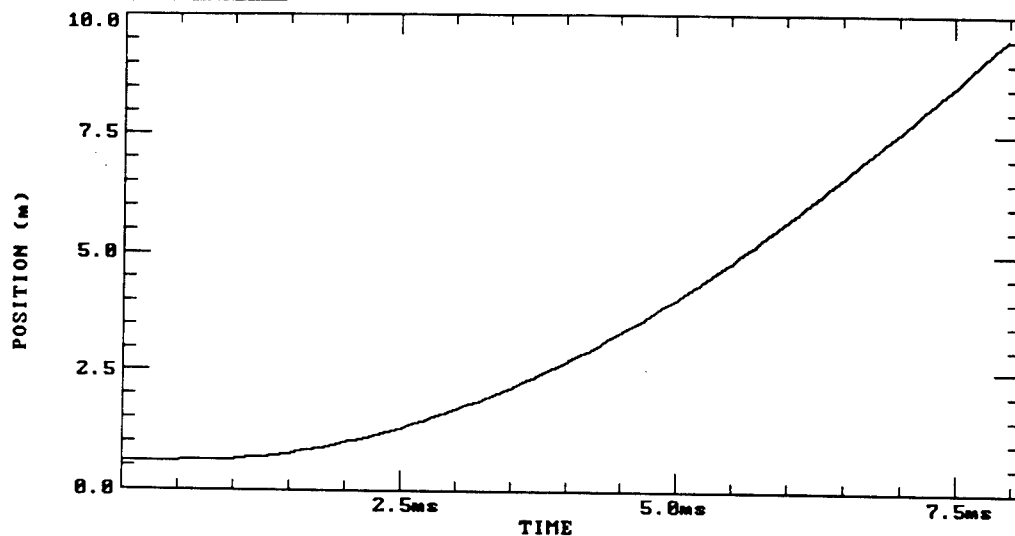


Figure 14. Projectile position vs. time in Task B gun.

The most obvious result from these tables is the insulator cases exhibit much greater transverse accelerations than those of the rails. This can be especially confusing if one refers back to the Task C centerline profiles in Figure 6, which shows that the rail centerline is displaced much more than that of the insulator. Intuitively, one would expect the more displaced centerline to result in a more aggravated response. The fact that the opposite is true relates back to the kinked tube phenomena touched on above. High lateral loads are imparted to the projectile when it must traverse a relatively small radius of curvature, such as found with a kink, which has a large deviation from the line of travel over a very short distance. For the rail profile, the projectile must travel a course with a large deviation from the true centerline, but this is done over the entire length of the barrel, thus minimizing the radius of curvature.

Table 5. Maximum Projectile Transverse Accelerations Through the Rail Centerline Profile of the Task C Railgun

| Case No. | Maximum Transverse Acceleration<br>(g's) |                   |               |
|----------|--|-------------------|---------------|
|          | Rear Contact                             | Center of Gravity | Front Contact |
| 1        | 1,867                                    | 929               | 1,606         |
| 2        | 2,870                                    | 2,770             | 4,001         |
| 3        | 3,119                                    | 3,206             | 2,207         |
| 4        | 3,201                                    | 3,463             | 2,707         |
| 5        | 3,235                                    | 3,233             | 1,830         |
| 6        | 1,762                                    | 4,406             | 1,692         |
| 7        | 1,931                                    | 3,509             | 4,270         |

Table 6. Maximum Projectile Transverse Accelerations Through the Insulator Centerline Profile of the Task C Railgun

| Case No. | Maximum Transverse Acceleration<br>(g's) |                   |               |
|----------|--|-------------------|---------------|
|          | Rear Contact                             | Center of Gravity | Front Contact |
| 1        | 2,296                                    | 934               | 2,241         |
| 2        | 8,362                                    | 4,306             | 11,020        |
| 3        | 10,438                                   | 5,140             | 6,716         |
| 4        | 12,139                                   | 6,586             | 5,904         |
| 5        | 12,004                                   | 6,888             | 6,914         |
| 6        | 5,040                                    | 4,618             | 4,437         |
| 7        | 4,837                                    | 4,850             | 9,680         |

The other noticeable result from Table 5 is the exceptionally low values of the transverse accelerations. These values are well below all the other Task B and Task C cases presented in this report, as well as those values reported for previous EM RASCAL in-bore dynamics studies. To unravel this dilemma, it

was noted that the interior ballistic model used for the Task C gun had a relatively low muzzle velocity of 1,062 m/s. It was believed this low velocity may be the cause of the reduced acceleration values. To test this postulate, two more RASCAL runs were made. These runs took the case 2 and case 4 conditions, but used the higher velocity forcing function of the Task B gun. Table 7 lists the maximum acceleration values for these two cases.

Table 7. Maximum Projectile Transverse Accelerations Through the Rail Centerline Profile of the Task C Railgun With Task B Gun Launch Velocity

| Stiffness Value<br>(lb/in) |                   | Maximum Transverse Acceleration<br>(g's) |                   |               |
|----------------------------|-------------------|--|-------------------|---------------|
| Rear                       | Front             | Rear Contact                             | Center of Gravity | Front Contact |
| $4.3 \times 10^5$          | $4.3 \times 10^5$ | 5,259                                    | 3,276             | 5,357         |
| $4.3 \times 10^5$          | $8.6 \times 10^5$ | 10,269                                   | 5,736             | 8,179         |

The resulting values indeed show that the low velocity used in the Task C simulation was responsible for the much reduced transverse acceleration values. While the Task C barrel exhibits transverse accelerations less than the Task B gun at a comparable velocity, the magnitudes are relatively equivalent. Unfortunately, this also means the accelerations induced by the insulator profile, reported in Table 6, are probably well below those which would occur at higher velocities, and will likely exceed those found for the Task B barrel.

#### 4. CONCLUSIONS

The results of the RASCAL in-bore dynamic analysis of the Task B and Task C 90-mm railguns point out an important consideration for EM projectile designers. Namely, when adopting a saddle sabot arrangement (that is, one with boreriding contacts at the ends of the projectile away from the projectile center of gravity), it is important to match the relative stiffness of the front and rear contacts. This investigation found that as the difference between the front and rear contact stiffness is increased, the resulting transverse accelerations are also elevated. Another means of avoiding this problem is to adopt a mid-riding armature configuration, thus resulting in a shape very near that of double-ramped KE projectiles which are the current standard.

Comparisons of the results from the Task B gun with those obtained in a previous RASCAL analysis of the SSG at Green Farms show the Task B gun to have the less severe centerline. The initial comparison of the Task B and Task C rail centerline profiles appears to favor the Task B system. However, much of the advantage results from the large difference in the velocity regimes employed in the analysis. Under equivalent loadings, the Task B and C rail centerline profiles produce approximately the same magnitude of transverse acceleration. The insulator profile of the Task C gun likely induces higher transverse accelerations than are present in the Task B barrel under equivalent velocity loading conditions.

As with previous RASCAL analyses of EM gun systems, the modeling of the trailing armature required a nonstandard technique. For this investigation the wedge shape of the armature was replaced with a block which had equivalent displacements under a uniform load along a single line in both structures. A more exact representation could be acquired by matching the deflected shapes of the wedge and block at numerous locations and would likely result in a more precise determination of the lateral loading.

INTENTIONALLY LEFT BLANK.

## 5. REFERENCES

- Burton, L. "A Comparison of In-Bore Projectile Motion From an Electromagnetic Railgun vs. that of a Conventional Cannon Barrel." ARL-TR-295, U.S. Army Research Laboratory, Aberdeen Proving Ground, MD, October 1993.
- Burton, L. "Effects of Bore Profile on EM-Launched Projectiles." 19th Army Science Conference, Orlando, FL, June 20-23, 1994a.
- Burton, L. "In-Bore Dynamic Response Analysis of a SLEKE I Projectile Fired From the Single Shot Gun (SSG) Railgun." ARL-TR-470, U.S. Army Research Laboratory, Aberdeen Proving Ground, MD, July 1994b.
- Burton, L. "Implications of Rail Straightness for EM-Launched Projectiles." IEEE Transactions on Magnetics, vol. 31, no. 1, pp. 101-106, January 1995.
- Erline, T. F. "Projectile Spring Constants Significance to Modeling With the Little RASCAL Gun Dynamics Program." BRL-TR-3224, U.S. Army Ballistic Research Laboratory, Aberdeen Proving Ground, MD, April 1991.
- Erline, T. F., and M. D. Kregel. "Flexible Projectile Modeling Using the Little RASCAL Gun Dynamics Program." Proceedings of the Sixth U.S. Army Symposium on Gun Dynamics, Tamiment, PA, May 1990.
- Hopkins, D. A. "Modeling Gun Dynamics With Three-Dimensional Beam Elements." Proceedings of the Sixth U.S. Army Symposium on Gun Dynamics, Tamiment, PA, May 1990.
- Lyon, D. H. "Radial Stiffness Measurements of 120-mm Tank Projectiles." ARL-TR-392, U.S. Army Research Laboratory, Aberdeen Proving Ground, MD, April 1994.
- Rabern, D. A., and K. A. Bannister. "Finite Element Models to Predict the Structural Response of 120-mm Sabot/Rods During Launch." Proceedings of the Sixth U.S. Army Symposium on Gun Dynamics, Tamiment, PA, May 1990.
- Statton, E. S., A. Alexander, and R. Dethlefsen. "Firings of Tactically-Successful Air-Defense Projectiles From a 90mm Electromagnetic Rail Gun." IEEE Transactions on Magnetics, vol. 31, no. 1, pp. 248-252, January 1995.
- Weddle, A. L. "Methodology Investigation of Gun-Tube Straightness Measurements." USACSTA-6439, Combat Systems Testing Activity, Aberdeen Proving Ground, MD, October 1986.
- Wilkerson, S. A. "The Use of Structural Codes to Study Gun Dynamics." ARL-TR-49, U.S. Army Research Laboratory, Aberdeen Proving Ground, MD, February 1993.

INTENTIONALLY LEFT BLANK.



**APPENDIX A:**

**LISTING OF RASCAL INPUT FILES FOR THE TASK B AND TASK C GUNS**

INTENTIONALLY LEFT BLANK.

# RASCAL File Listing of the Task B Gun Centerline Measurement

|       |           |        |       |        |        |
|-------|-----------|--------|-------|--------|--------|
| 2     | E         |        |       |        |        |
|       | insulator | rail   |       |        |        |
| axial | <- +>     | v- +^  |       |        |        |
| 0.0   | 0.000     | 0.000  | 180.0 | -0.005 | 0.007  |
| 6.0   | 0.002     | 0.000  | 186.0 | -0.001 | 0.000  |
| 13.0  | 0.000     | -0.002 | 192.0 | 0.002  | -0.006 |
| 18.0  | -0.001    | 0.000  | 198.0 | -0.004 | -0.010 |
| 24.0  | -0.001    | 0.000  | 204.0 | 0.001  | -0.009 |
| 30.0  | -0.002    | 0.003  | 210.0 | 0.000  | -0.007 |
| 36.0  | -0.004    | 0.004  | 216.0 | -0.002 | -0.005 |
| 42.0  | -0.003    | 0.004  | 222.0 | -0.005 | -0.007 |
| 48.0  | -0.002    | 0.008  | 228.0 | -0.009 | -0.010 |
| 54.0  | -0.001    | 0.008  | 234.0 | -0.008 | -0.011 |
| 60.0  | 0.000     | 0.009  | 240.0 | -0.009 | -0.012 |
| 66.0  | -0.002    | 0.010  | 246.0 | -0.010 | -0.010 |
| 72.0  | 0.001     | 0.007  | 252.0 | -0.011 | -0.010 |
| 78.0  | 0.003     | 0.010  | 258.0 | -0.011 | -0.013 |
| 84.0  | 0.002     | 0.012  | 264.0 | -0.011 | -0.015 |
| 90.0  | -0.001    | 0.013  | 270.0 | -0.011 | -0.014 |
| 96.0  | -0.005    | 0.008  | 276.0 | -0.013 | -0.014 |
| 102.0 | -0.004    | 0.013  | 282.0 | -0.014 | -0.014 |
| 108.0 | 0.000     | 0.012  | 288.0 | -0.014 | -0.011 |
| 114.0 | 0.000     | 0.017  | 294.0 | -0.012 | -0.010 |
| 120.0 | 0.000     | 0.006  | 300.0 | -0.009 | -0.009 |
| 126.0 | 0.004     | 0.005  | 306.0 | -0.007 | -0.010 |
| 132.0 | -0.008    | 0.005  | 312.0 | -0.004 | -0.010 |
| 138.0 | -0.010    | 0.005  | 318.0 | 0.003  | -0.010 |
| 144.0 | -0.008    | 0.005  | 324.0 | 0.008  | -0.006 |
| 150.0 | -0.008    | 0.007  | 330.0 | 0.007  | -0.007 |
| 156.0 | -0.006    | 0.006  | 336.0 | 0.000  | -0.004 |
| 162.0 | -0.009    | 0.005  | 342.0 | 0.000  | -0.002 |
| 168.0 | -0.011    | 0.003  | 348.0 | -0.001 | 0.000  |
| 174.0 | -0.009    | 0.005  | 354.0 | 0.000  | 0.000  |

# RASCAL File Listing of the Task B Gun Velocity Vs. Time Prediction

| 3 m 2 1.0 |              |          |       |          |          |
|-----------|--------------|----------|-------|----------|----------|
| time      | velocity     | position | time  | velocity | position |
| (ms)      | (m/s)        | (m)      | (ms)  | (m/s)    | (m)      |
| 0.000     | 0.112555E-13 | 0.609600 | 4.200 | 1237.79  | 2.93991  |
| 0.100     | 0.112555E-13 | 0.609600 | 4.300 | 1266.17  | 3.06510  |
| 0.200     | 0.312483     | 0.609606 | 4.400 | 1297.75  | 3.19328  |
| 0.300     | 2.82988      | 0.609740 | 4.500 | 1333.62  | 3.32482  |
| 0.400     | 7.87869      | 0.610264 | 4.600 | 1369.42  | 3.45998  |
| 0.500     | 14.9248      | 0.611360 | 4.700 | 1402.89  | 3.59951  |
| 0.600     | 28.6949      | 0.613487 | 4.800 | 1435.10  | 3.74137  |
| 0.700     | 48.1299      | 0.617297 | 4.900 | 1465.40  | 3.88649  |
| 0.800     | 70.4943      | 0.623168 | 5.000 | 1494.47  | 4.03448  |
| 0.900     | 102.984      | 0.631768 | 5.100 | 1525.45  | 4.18546  |
| 1.000     | 143.647      | 0.644047 | 5.200 | 1559.18  | 4.33967  |
| 1.100     | 186.096      | 0.660539 | 5.300 | 1592.70  | 4.49728  |
| 1.200     | 227.957      | 0.681314 | 5.400 | 1624.26  | 4.65823  |
| 1.300     | 269.198      | 0.706171 | 5.500 | 1654.09  | 4.82210  |
| 1.400     | 309.773      | 0.735122 | 5.600 | 1682.25  | 4.98879  |
| 1.500     | 349.644      | 0.768100 | 5.700 | 1708.77  | 5.15825  |
| 1.600     | 388.775      | 0.805027 | 5.800 | 1733.76  | 5.33029  |
| 1.700     | 427.135      | 0.845829 | 5.900 | 1757.31  | 5.50477  |
| 1.800     | 464.702      | 0.890424 | 6.000 | 1779.49  | 5.68155  |
| 1.900     | 501.453      | 0.938733 | 6.100 | 1800.40  | 5.86049  |
| 2.000     | 537.359      | 0.990677 | 6.200 | 1820.12  | 6.04146  |
| 2.100     | 572.423      | 1.04616  | 6.300 | 1838.71  | 6.22435  |
| 2.200     | 606.617      | 1.10512  | 6.400 | 1856.26  | 6.40902  |
| 2.300     | 639.933      | 1.16745  | 6.500 | 1872.80  | 6.59542  |
| 2.400     | 672.375      | 1.23306  | 6.600 | 1888.39  | 6.78346  |
| 2.500     | 703.927      | 1.30188  | 6.700 | 1903.11  | 6.97303  |
| 2.600     | 734.604      | 1.37381  | 6.800 | 1917.01  | 7.16404  |
| 2.700     | 764.398      | 1.44877  | 6.900 | 1930.13  | 7.35641  |
| 2.800     | 793.313      | 1.52666  | 7.000 | 1942.53  | 7.55005  |
| 2.900     | 821.366      | 1.60740  | 7.100 | 1954.26  | 7.74490  |
| 3.000     | 848.558      | 1.69091  | 7.200 | 1965.35  | 7.94089  |
| 3.100     | 874.889      | 1.77713  | 7.300 | 1975.84  | 8.13797  |
| 3.200     | 900.310      | 1.86592  | 7.400 | 1985.77  | 8.33607  |
| 3.300     | 929.905      | 1.95739  | 7.500 | 1995.17  | 8.53513  |
| 3.400     | 965.535      | 2.05211  | 7.600 | 2004.07  | 8.73511  |
| 3.500     | 1004.87      | 2.15064  | 7.700 | 2012.51  | 8.93595  |
| 3.600     | 1042.65      | 2.25306  | 7.800 | 2020.51  | 9.13761  |
| 3.700     | 1078.89      | 2.35914  | 7.900 | 2028.09  | 9.34005  |
| 3.800     | 1113.60      | 2.46876  | 8.000 | 2035.28  | 9.54322  |
| 3.900     | 1146.82      | 2.58180  | 8.100 | 2042.11  | 9.74710  |
| 4.000     | 1178.60      | 2.69809  |       |          |          |
| 4.100     | 1208.98      | 2.81749  |       |          |          |

### RASCAL File Listing of Task B Gun Description

```

1  m
Gun Description File of Task B Gun
0.0      5.0e7
1.3188   5.0e7
2.5e-05
675.0    0.559
0.148    0.273
0.298    0.0    0.0
0.0460   0.045
0.3048   0.4826
0.0      2.46e10 5342.2    2.46e10    5342.2

```

### RASCAL File Listing of Task B Gun Barrel Description

```

1  E
UT-CEM Task B Barrel Description
0.0      9.0
155.0    9.0
354.0    9.0

```

### RASCAL File Listing of SLEKE II Projectile Description

```

1  E
SLEKE II projectile
4.3e05    6.1e05
6
0.803     0.844
2.702     0.844
2.703     1.773
4.721     1.773
5.5322    1.1705
10.737    0.763
          0.95    12.096
4
10.737    0.763    0.325
11.571    1.263    0.773
11.696    1.775    1.023
12.496    1.775    1.4675
12.83     0.325    1.3    2.73
0.001
51.0e06   0.64
10.0e06   0.1
51.0e06   0.64
10.0e06   0.1

```

### RASCAL File Listing of Task C Gun Description

```

1  m
Gun Description File of Task C Gun
0.0      5.0e7
1.3188   5.0e7
2.5e-05
675.0    0.559
0.148    0.273
0.298    0.0    0.0
0.0460   0.045
0.3048   0.4826
0.0      1.74e11(rails); 1.87e11(ins) 3792.2  1.47e11(rails; 1.87e11(ins) 3792.2

```

# RASCAL File Listing of Task C Gun Barrel Description

```

1  E
Task C Barrel Description
0.0    12.7
155.0  12.7
280.0  12.7

```

## RASCAL File Listing of Task C Gun Centerline Measurement

| 2     |  | E      |    | insulator |    | rail  |  | axial  |    | insulator |    | rail  |  |
|-------|--|--------|----|-----------|----|-------|--|--------|----|-----------|----|-------|--|
| axial |  | v-     | +^ | <-        | +> | axial |  | v-     | +^ | <-        | +> | axial |  |
| 0.0   |  | 0.000  |    | 0.000     |    | 144.0 |  | -0.004 |    | 0.178     |    | 144.0 |  |
| 4.0   |  | 0.001  |    | 0.007     |    | 148.0 |  | -0.009 |    | 0.176     |    | 148.0 |  |
| 8.0   |  | 0.005  |    | 0.010     |    | 152.0 |  | -0.014 |    | 0.175     |    | 152.0 |  |
| 12.0  |  | 0.005  |    | 0.022     |    | 156.0 |  | -0.017 |    | 0.175     |    | 156.0 |  |
| 16.0  |  | 0.001  |    | 0.027     |    | 160.0 |  | -0.019 |    | 0.176     |    | 160.0 |  |
| 20.0  |  | 0.001  |    | 0.036     |    | 164.0 |  | -0.020 |    | 0.176     |    | 164.0 |  |
| 24.0  |  | 0.000  |    | 0.045     |    | 168.0 |  | -0.021 |    | 0.177     |    | 168.0 |  |
| 28.0  |  | -0.002 |    | 0.047     |    | 172.0 |  | -0.021 |    | 0.182     |    | 172.0 |  |
| 32.0  |  | -0.004 |    | 0.056     |    | 176.0 |  | -0.019 |    | 0.185     |    | 176.0 |  |
| 36.0  |  | -0.002 |    | 0.063     |    | 180.0 |  | -0.004 |    | 0.188     |    | 180.0 |  |
| 40.0  |  | -0.003 |    | 0.072     |    | 184.0 |  | -0.019 |    | 0.188     |    | 184.0 |  |
| 44.0  |  | -0.005 |    | 0.076     |    | 188.0 |  | -0.021 |    | 0.189     |    | 188.0 |  |
| 48.0  |  | -0.004 |    | 0.084     |    | 192.0 |  | -0.022 |    | 0.182     |    | 192.0 |  |
| 52.0  |  | 0.000  |    | 0.089     |    | 196.0 |  | -0.024 |    | 0.174     |    | 196.0 |  |
| 56.0  |  | 0.003  |    | 0.096     |    | 200.0 |  | -0.024 |    | 0.169     |    | 200.0 |  |
| 60.0  |  | 0.000  |    | 0.100     |    | 204.0 |  | -0.024 |    | 0.165     |    | 204.0 |  |
| 64.0  |  | -0.003 |    | 0.104     |    | 208.0 |  | -0.024 |    | 0.159     |    | 208.0 |  |
| 68.0  |  | -0.006 |    | 0.106     |    | 212.0 |  | -0.027 |    | 0.158     |    | 212.0 |  |
| 72.0  |  | -0.014 |    | 0.113     |    | 216.0 |  | -0.029 |    | 0.153     |    | 216.0 |  |
| 76.0  |  | -0.010 |    | 0.118     |    | 220.0 |  | -0.030 |    | 0.147     |    | 220.0 |  |
| 80.0  |  | -0.006 |    | 0.125     |    | 224.0 |  | -0.033 |    | 0.141     |    | 224.0 |  |
| 84.0  |  | -0.002 |    | 0.135     |    | 228.0 |  | -0.037 |    | 0.133     |    | 228.0 |  |
| 88.0  |  | -0.002 |    | 0.146     |    | 232.0 |  | -0.039 |    | 0.127     |    | 232.0 |  |
| 92.0  |  | -0.005 |    | 0.154     |    | 236.0 |  | -0.040 |    | 0.113     |    | 236.0 |  |
| 96.0  |  | -0.009 |    | 0.160     |    | 240.0 |  | -0.045 |    | 0.100     |    | 240.0 |  |
| 100.0 |  | -0.015 |    | 0.164     |    | 244.0 |  | -0.048 |    | 0.093     |    | 244.0 |  |
| 104.0 |  | -0.022 |    | 0.166     |    | 248.0 |  | -0.047 |    | 0.081     |    | 248.0 |  |
| 108.0 |  | -0.023 |    | 0.165     |    | 252.0 |  | -0.042 |    | 0.077     |    | 252.0 |  |
| 112.0 |  | -0.016 |    | 0.169     |    | 256.0 |  | -0.039 |    | 0.071     |    | 256.0 |  |
| 116.0 |  | -0.010 |    | 0.171     |    | 260.0 |  | -0.040 |    | 0.063     |    | 260.0 |  |
| 120.0 |  | -0.005 |    | 0.171     |    | 264.0 |  | -0.036 |    | 0.054     |    | 264.0 |  |
| 124.0 |  | -0.003 |    | 0.171     |    | 268.0 |  | -0.033 |    | 0.047     |    | 268.0 |  |
| 128.0 |  | 0.001  |    | 0.174     |    | 272.0 |  | -0.027 |    | 0.036     |    | 272.0 |  |
| 132.0 |  | 0.003  |    | 0.174     |    | 276.0 |  | -0.015 |    | 0.020     |    | 276.0 |  |
| 136.0 |  | 0.000  |    | 0.179     |    | 280.0 |  | 0.000  |    | 0.000     |    | 280.0 |  |
| 140.0 |  | -0.001 |    | 0.180     |    |       |  |        |    |           |    |       |  |

# RASCAL File Listing of Task C Gun Velocity Vs. Time Projection

2 m 2 1.0

| time<br>(ms) | velocity<br>(m/s) | time<br>(ms) | velocity<br>(m/s) |
|--------------|-------------------|--------------|-------------------|
| 0.000        | 0.0               | 4.6175       | 910.0             |
| 0.098245     | 0.0               | 4.7157       | 918.0             |
| 0.196489     | 1.0               | 4.8140       | 926.0             |
| 0.294734     | 5.0               | 4.9122       | 933.0             |
| 0.392978     | 12.0              | 5.0105       | 940.0             |
| 0.491223     | 20.0              | 5.1087       | 947.0             |
| 0.589468     | 32.0              | 5.2070       | 953.0             |
| 0.687713     | 47.0              | 5.3052       | 959.0             |
| 0.785957     | 68.0              | 5.4035       | 964.0             |
| 0.884202     | 92.0              | 5.5017       | 970.0             |
| 0.982446     | 120.0             | 5.5999       | 975.0             |
| 1.0807       | 149.0             | 5.6982       | 980.0             |
| 1.1789       | 181.0             | 5.7964       | 985.0             |
| 1.2772       | 216.0             | 5.8947       | 989.0             |
| 1.3754       | 239.0             | 5.9929       | 993.0             |
| 1.4737       | 280.0             | 6.0911       | 997.0             |
| 1.5719       | 304.0             | 6.1894       | 1001.0            |
| 1.6702       | 344.0             | 6.2977       | 1005.0            |
| 1.7684       | 382.0             | 6.3859       | 1008.0            |
| 1.8666       | 418.0             | 6.4841       | 1012.0            |
| 1.9649       | 451.0             | 6.5824       | 1015.0            |
| 2.0631       | 483.0             | 6.6806       | 1018.0            |
| 2.1614       | 512.0             | 6.7789       | 1021.0            |
| 2.2596       | 540.0             | 6.8771       | 1024.0            |
| 2.3579       | 559.0             | 6.9754       | 1026.0            |
| 2.4561       | 584.0             | 7.0736       | 1029.0            |
| 2.5544       | 607.0             | 7.1719       | 1031.0            |
| 2.6526       | 630.0             | 7.2701       | 1033.0            |
| 2.7509       | 651.0             | 7.3684       | 1036.0            |
| 2.8491       | 672.0             | 7.4666       | 1038.0            |
| 2.9473       | 692.0             | 7.5648       | 1040.0            |
| 3.0456       | 710.0             | 7.6631       | 1042.0            |
| 3.1438       | 728.0             | 7.7613       | 1043.0            |
| 3.2421       | 745.0             | 7.8596       | 1045.0            |
| 3.3403       | 761.0             | 7.9578       | 1047.0            |
| 3.4386       | 776.0             | 8.0561       | 1048.0            |
| 3.5368       | 790.0             | 8.1543       | 1050.0            |
| 3.6351       | 804.0             | 8.2526       | 1051.0            |
| 3.7333       | 817.0             | 8.3508       | 1053.0            |
| 3.8315       | 830.0             | 8.4490       | 1054.0            |
| 3.9298       | 842.0             | 8.5473       | 1055.0            |
| 4.0280       | 853.0             | 8.6455       | 1056.0            |
| 4.1263       | 864.0             | 8.7438       | 1057.0            |
| 4.2245       | 874.0             | 8.8420       | 1058.0            |
| 4.3228       | 884.0             | 8.9403       | 1059.0            |
| 4.4210       | 893.0             | 9.0385       | 1060.0            |
| 4.5193       | 902.0             | 9.1368       | 1061.0            |
|              |                   | 9.2350       | 1062.0            |

INTENTIONALLY LEFT BLANK.



**APPENDIX B:**  
**TRANSVERSE ACCELERATION PLOTS FOR TASK B GUN**

INTENTIONALLY LEFT BLANK.

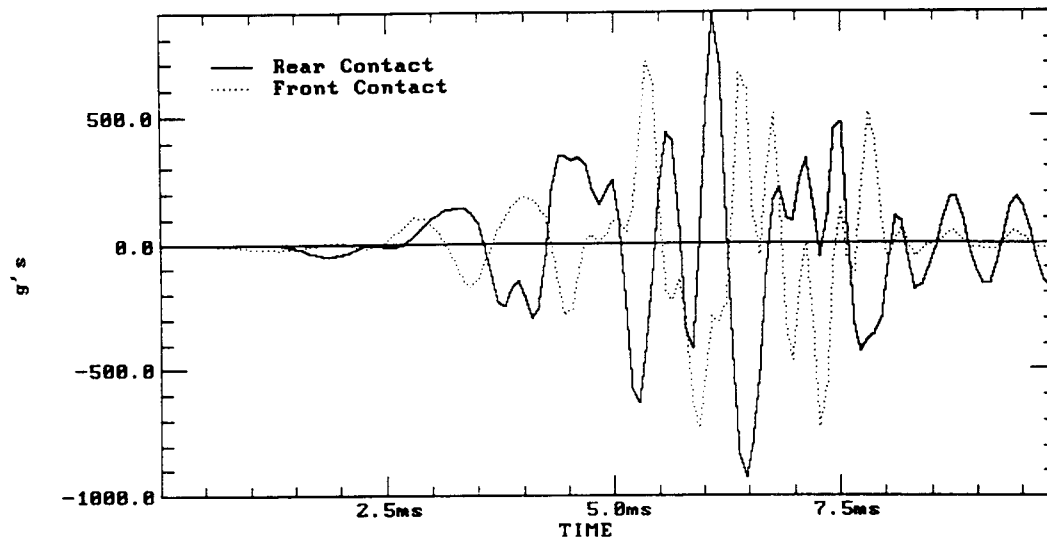


Figure B-1. Case 1 transverse acceleration from Task B gun - rail centerline.

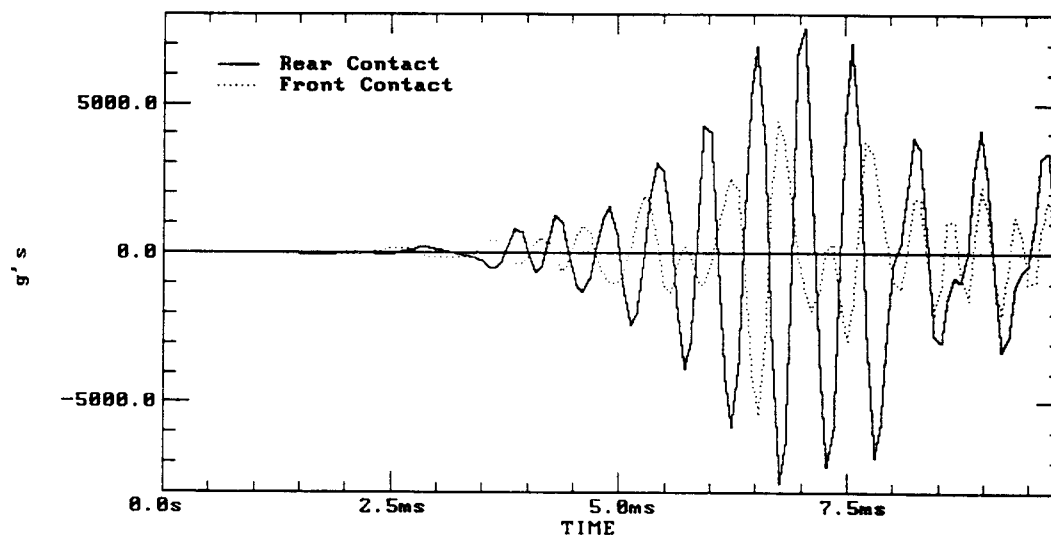


Figure B-2. Case 2 transverse acceleration from Task B gun - rail centerline.

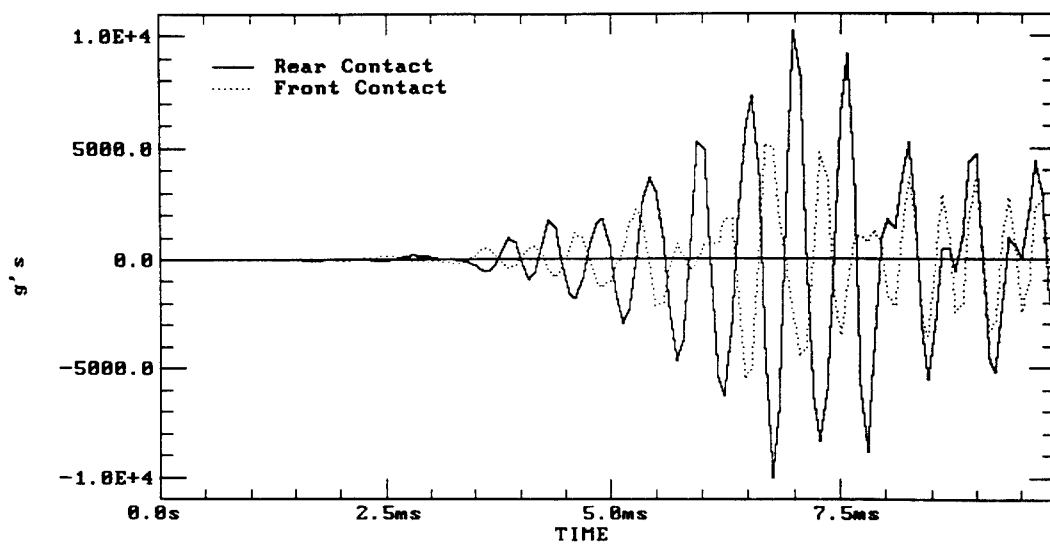


Figure B-3. Case 3 transverse acceleration from Task B gun - rail centerline.

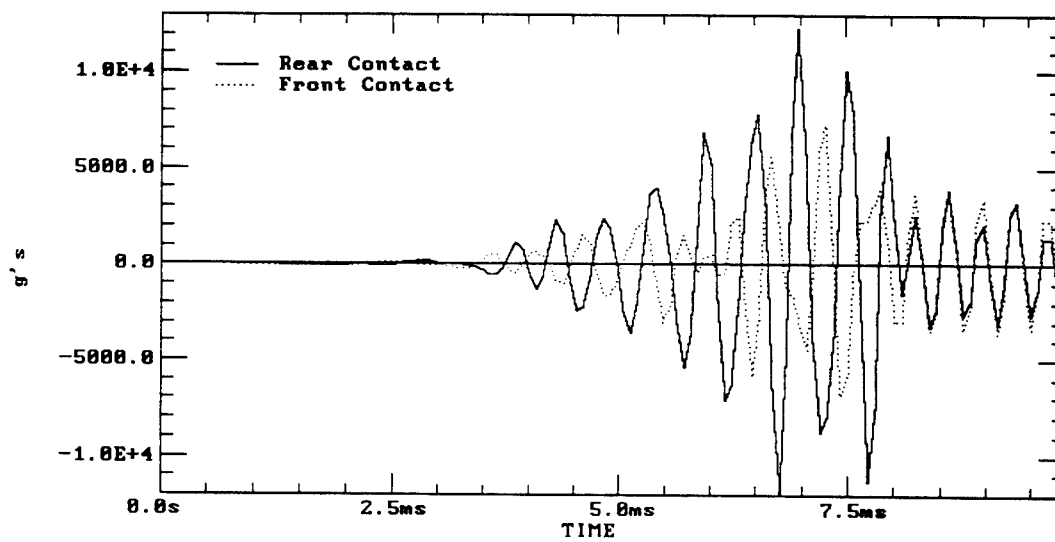


Figure B-4. Case 4 transverse acceleration from Task B gun - rail centerline.

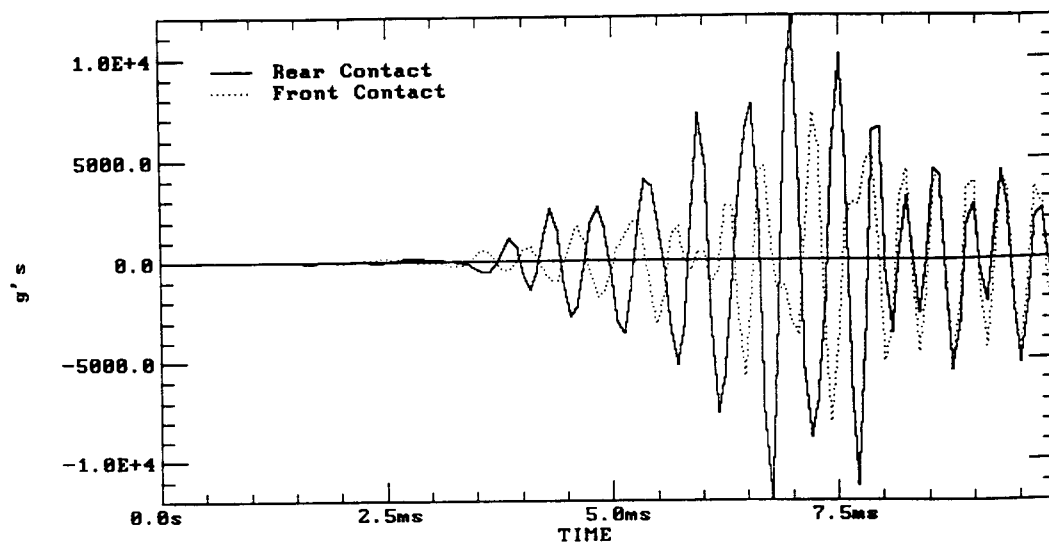


Figure B-5. Case 5 transverse acceleration from Task B gun - rail centerline.

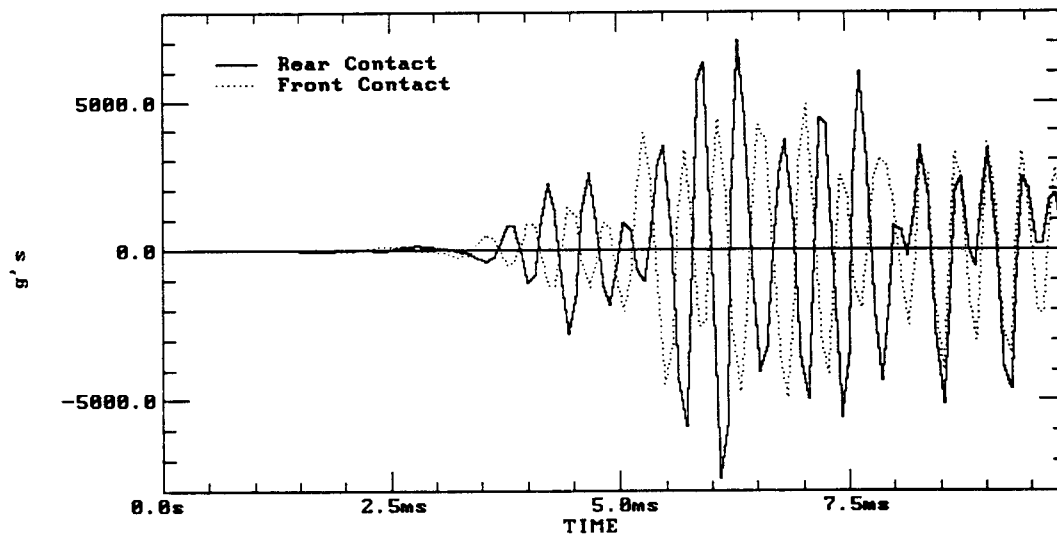


Figure B-6. Case 6 transverse acceleration from Task B gun - rail centerline.

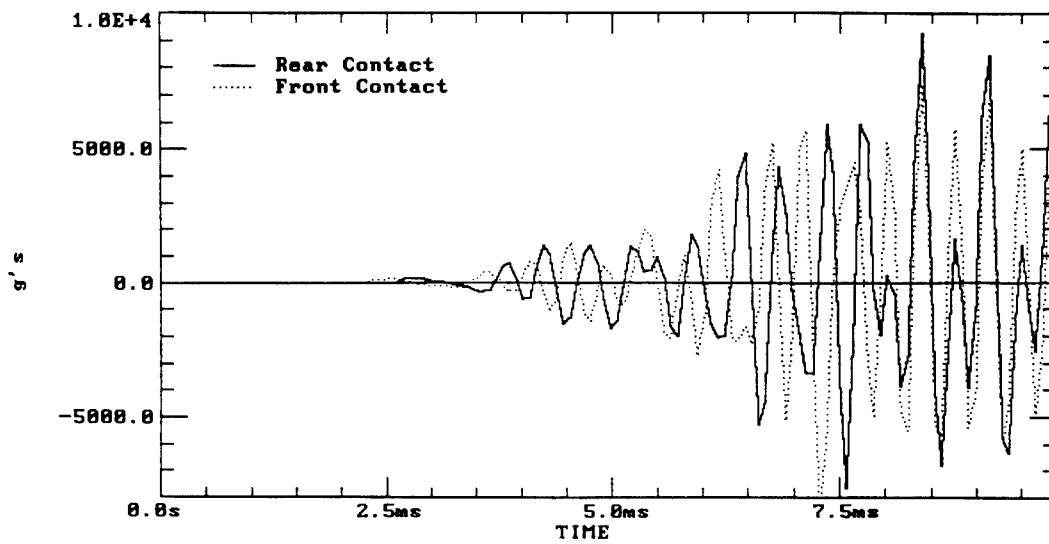


Figure B-7. Case 7 transverse acceleration from Task B gun - rail centerline.

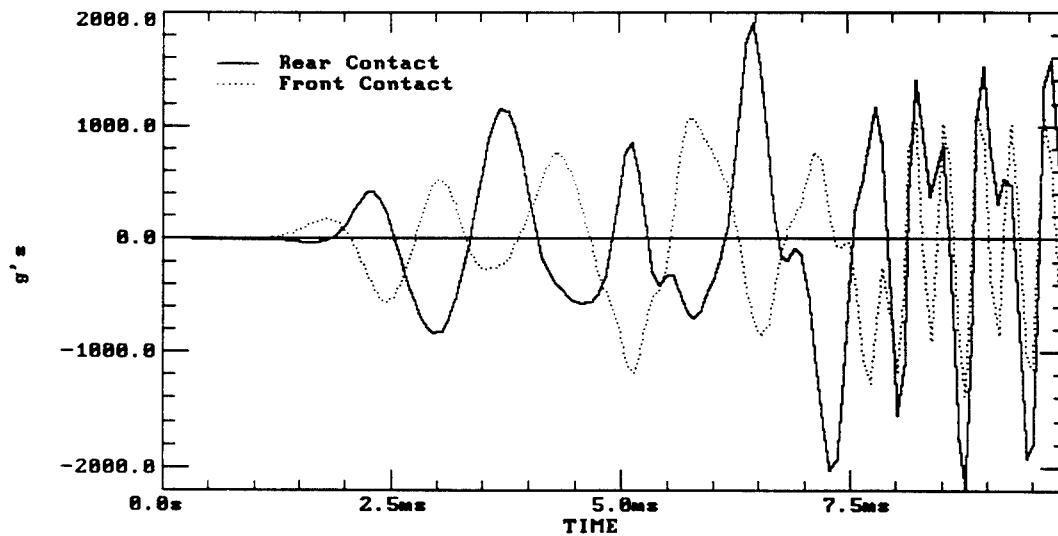


Figure B-8. Case 1 transverse acceleration from Task B gun insulator centerline.

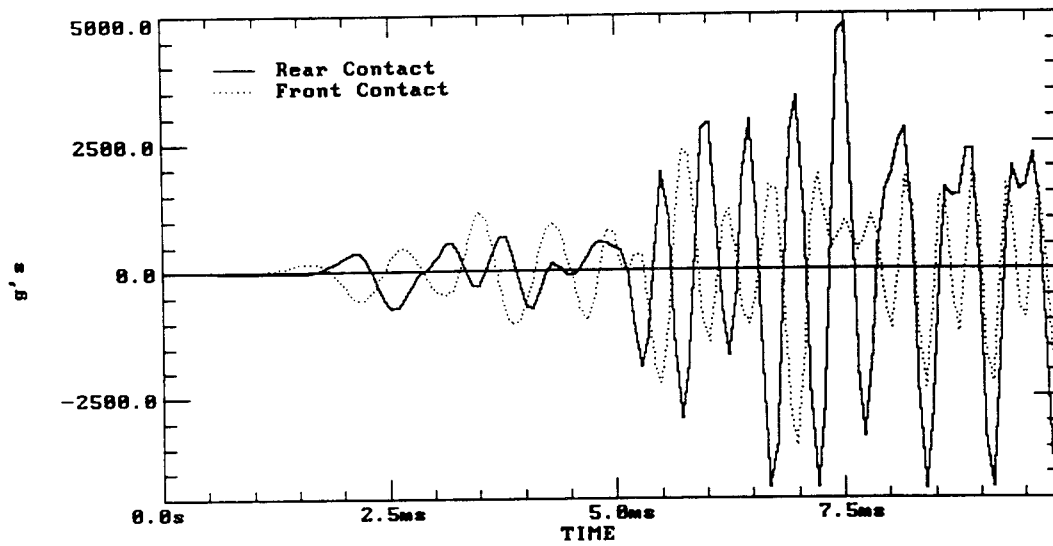


Figure B-9. Case 2 transverse acceleration from Task B gun insulator centerline.

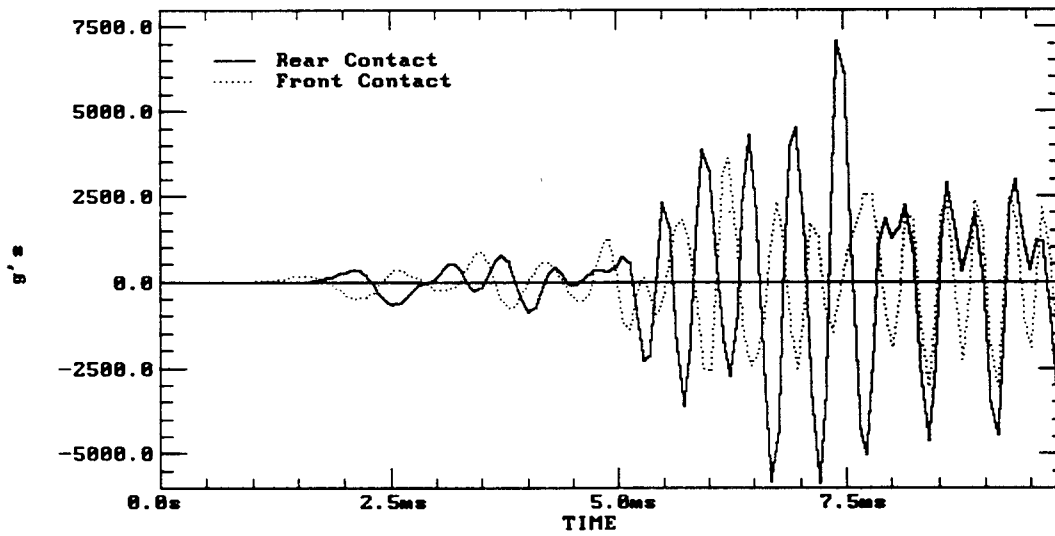


Figure B-10. Case 3 transverse acceleration from Task B gun insulator centerline.

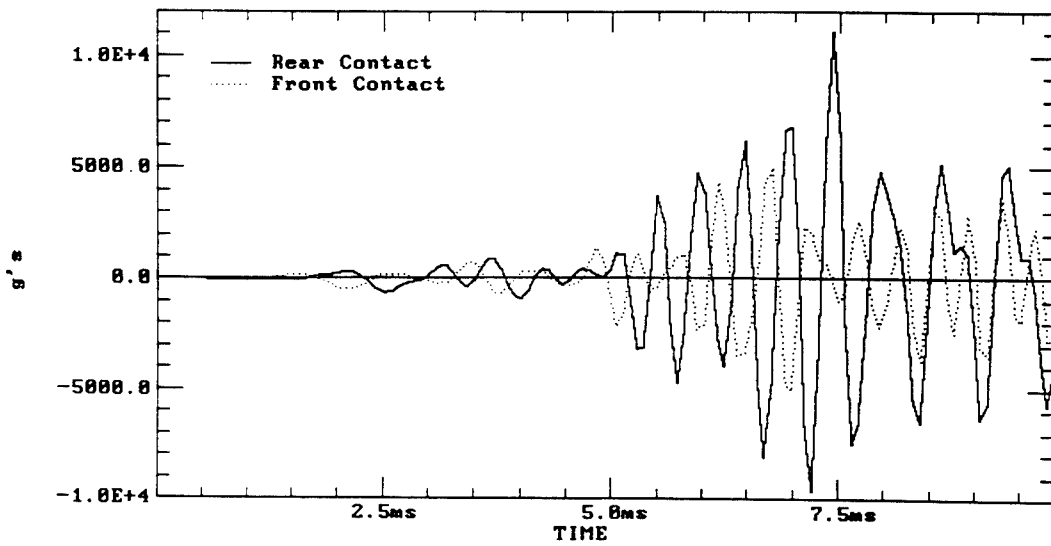


Figure B-11. Case 4 transverse acceleration from Task B gun insulator centerline.

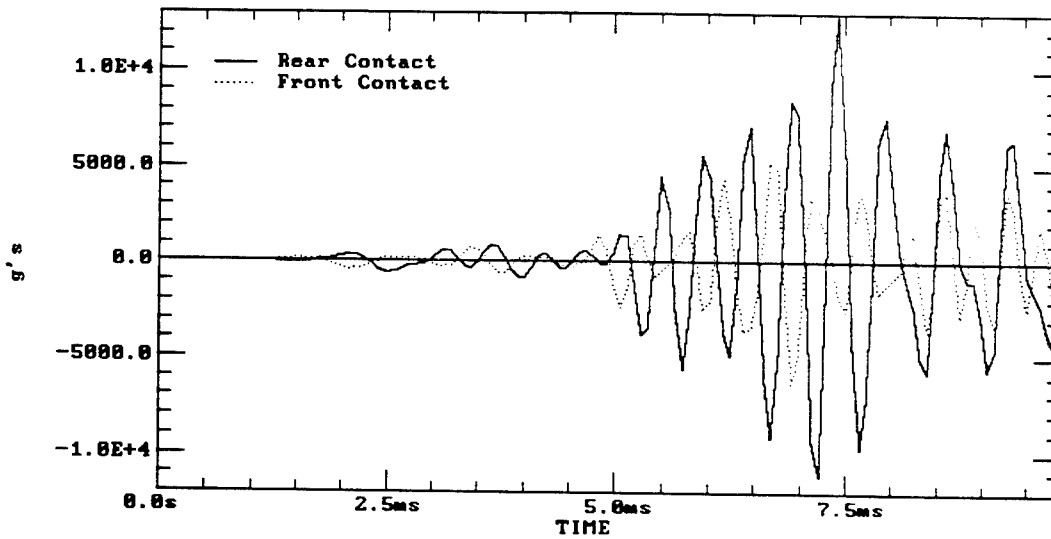


Figure B-12. Case 5 transverse acceleration from Task B gun insulator centerline.



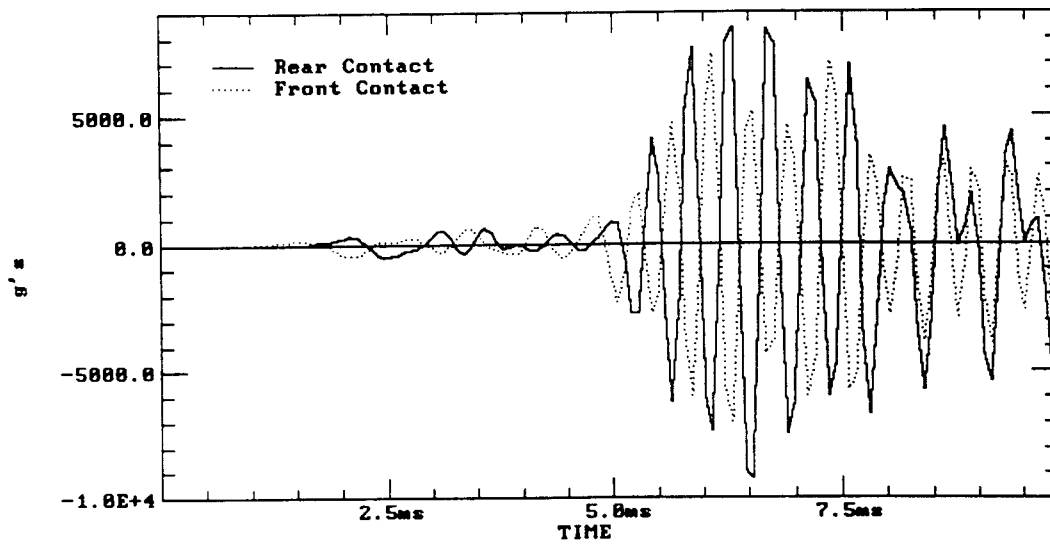


Figure B-13. Case 6 transverse acceleration from Task B gun insulator centerline.

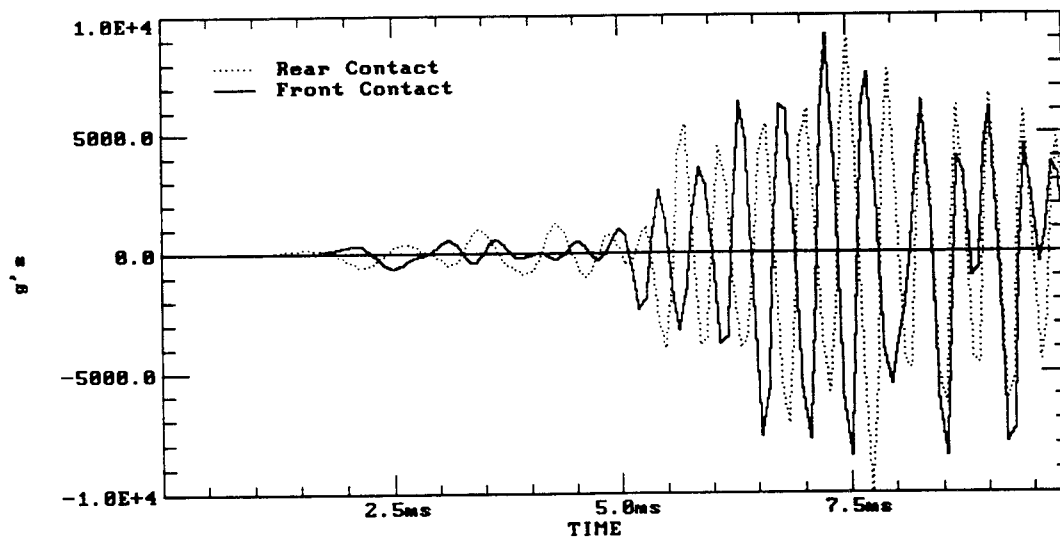


Figure B-14. Case 7 transverse acceleration from Task B gun insulator centerline.

INTENTIONALLY LEFT BLANK.

APPENDIX C:  
ANGULAR ACCELERATION PLOTS FOR TASK B GUN

INTENTIONALLY LEFT BLANK.

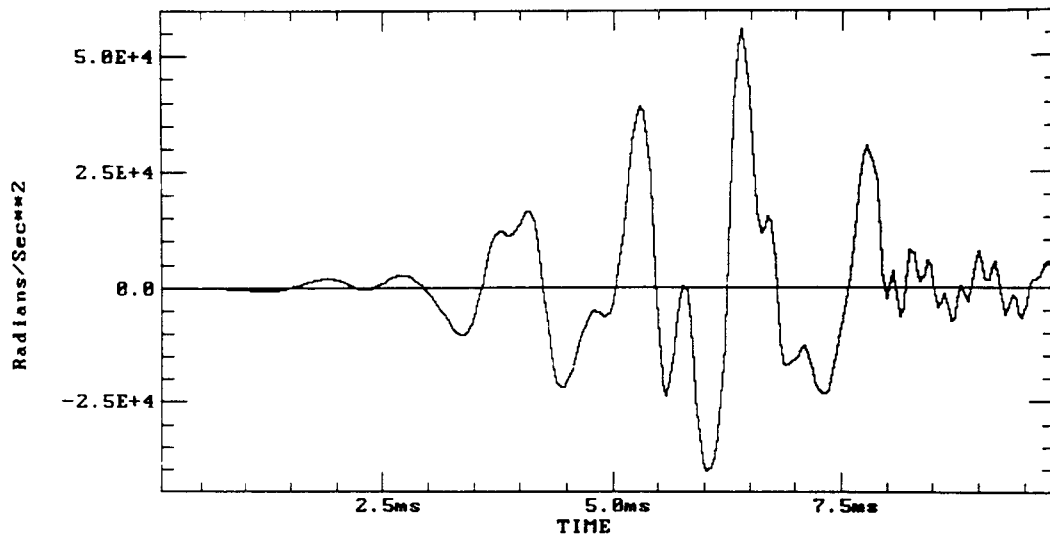


Figure C-1. Case 1 angular acceleration from Task B gun - rail centerline.

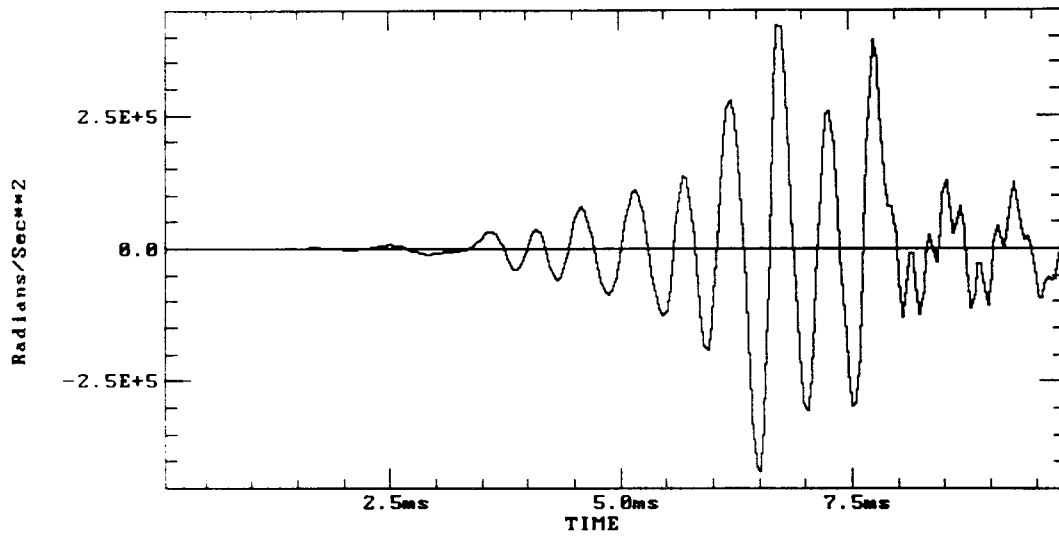


Figure C-2. Case 2 angular acceleration from Task B gun - rail centerline.

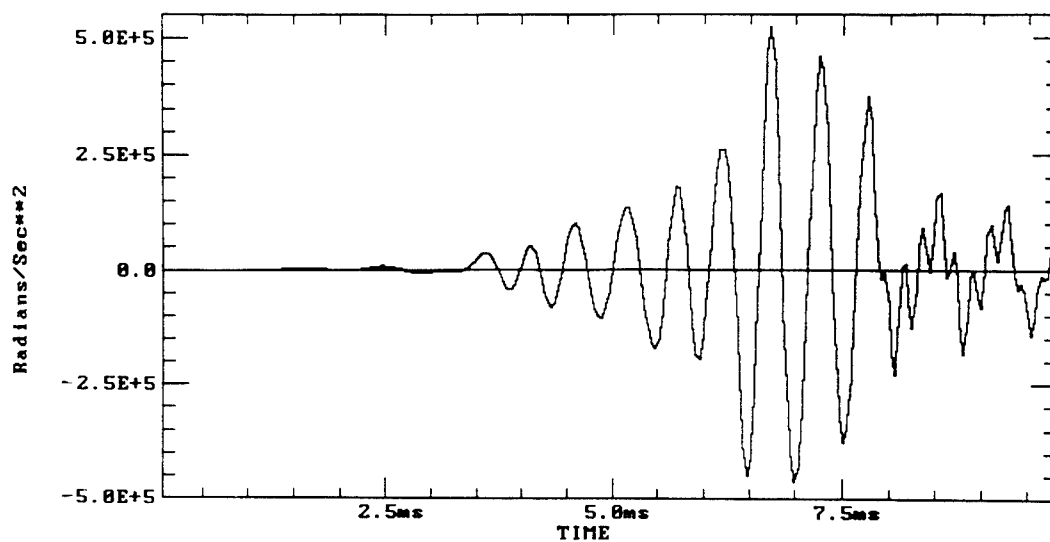


Figure C-3. Case 3 angular acceleration from Task B gun - rail centerline.

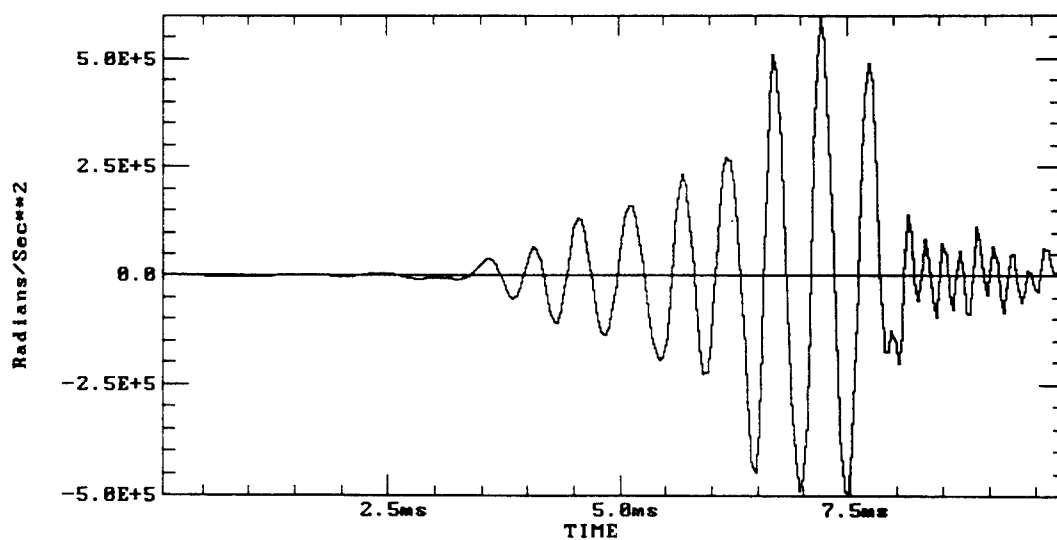


Figure C-4. Case 4 angular acceleration from Task B gun - rail centerline.

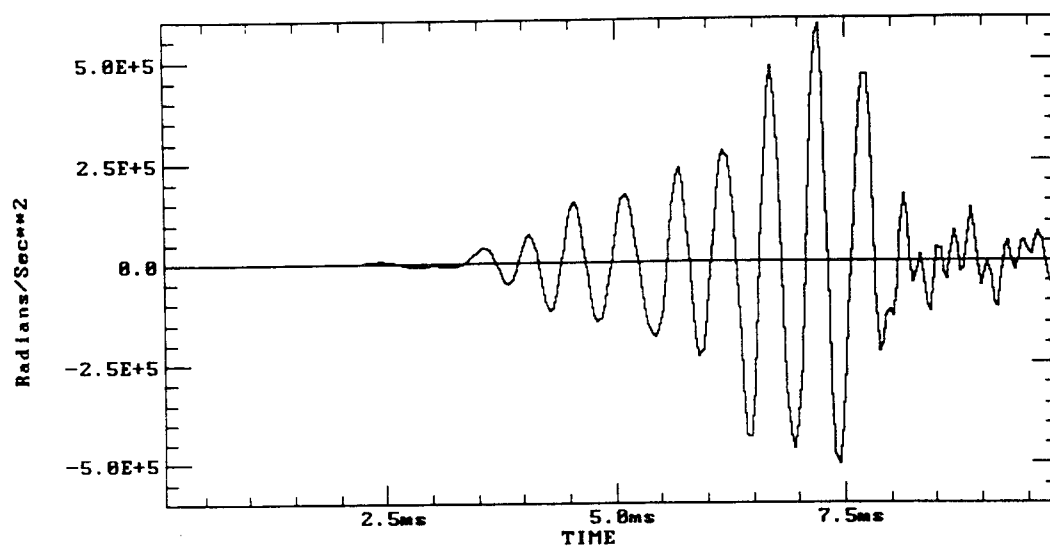


Figure C-5. Case 5 angular acceleration from Task B gun - rail centerline.

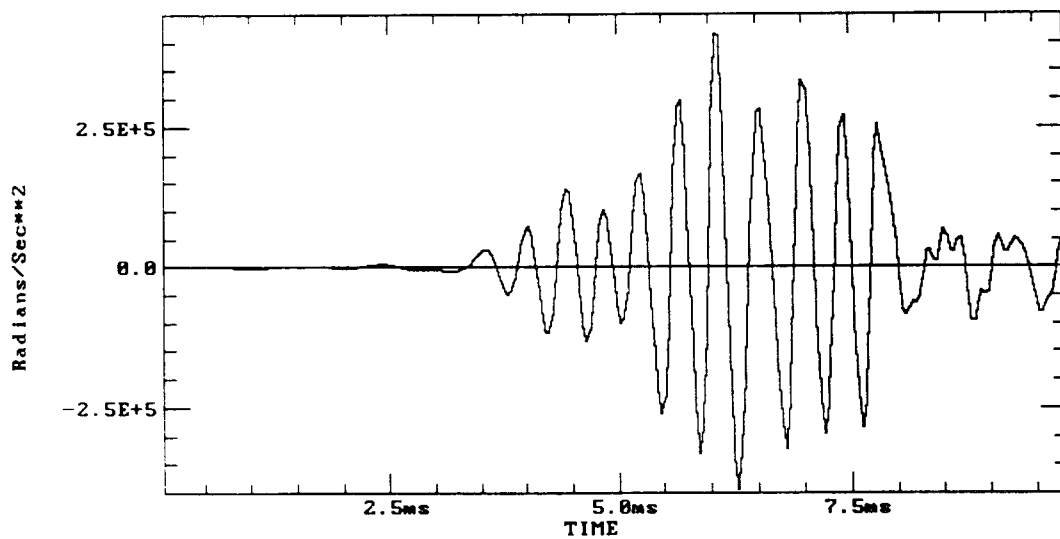


Figure C-6. Case 6 angular acceleration from Task B gun - rail centerline.

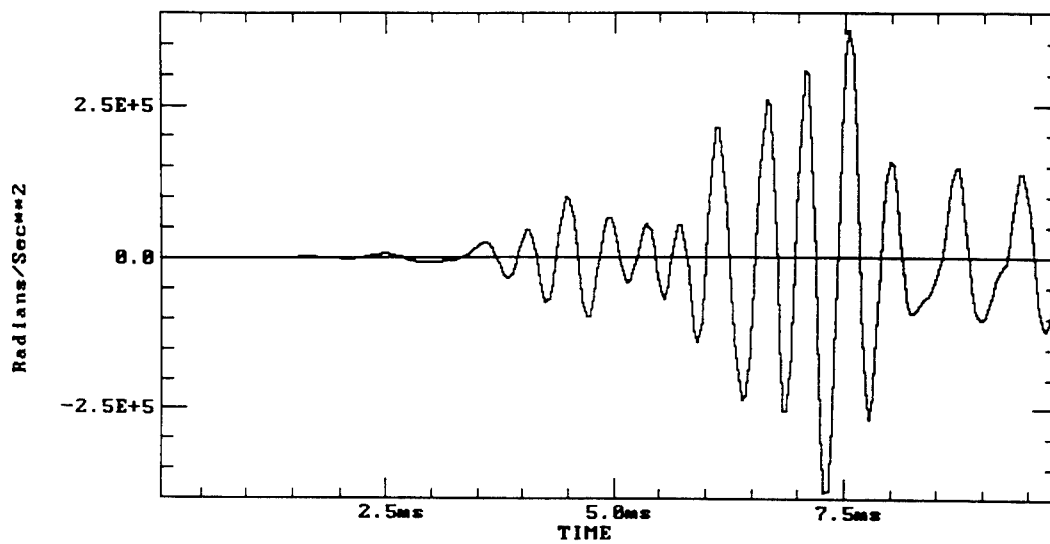


Figure C-7. Case 7 angular acceleration from Task B gun - rail centerline.

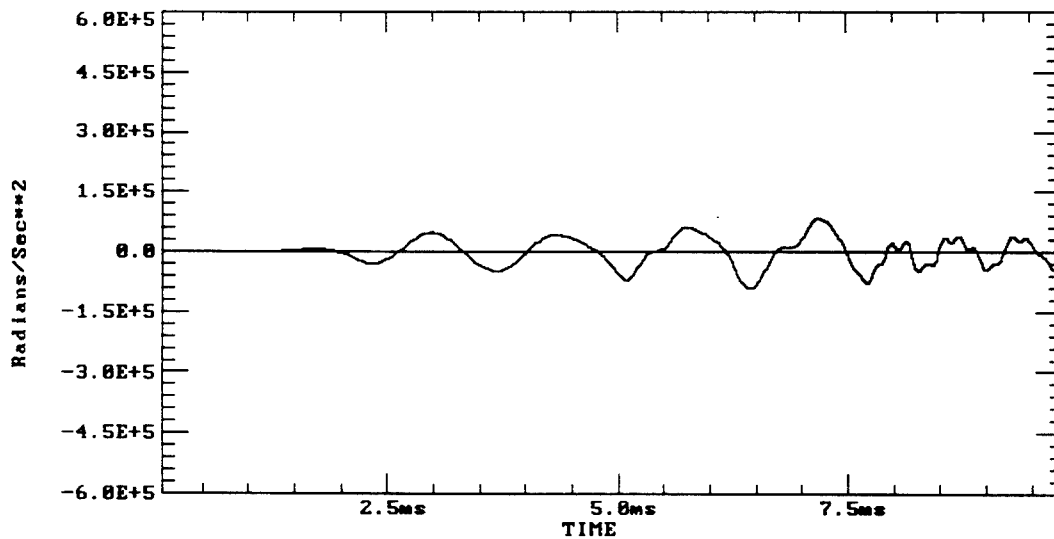


Figure C-8. Case 1 angular acceleration from Task B gun insulator centerline.



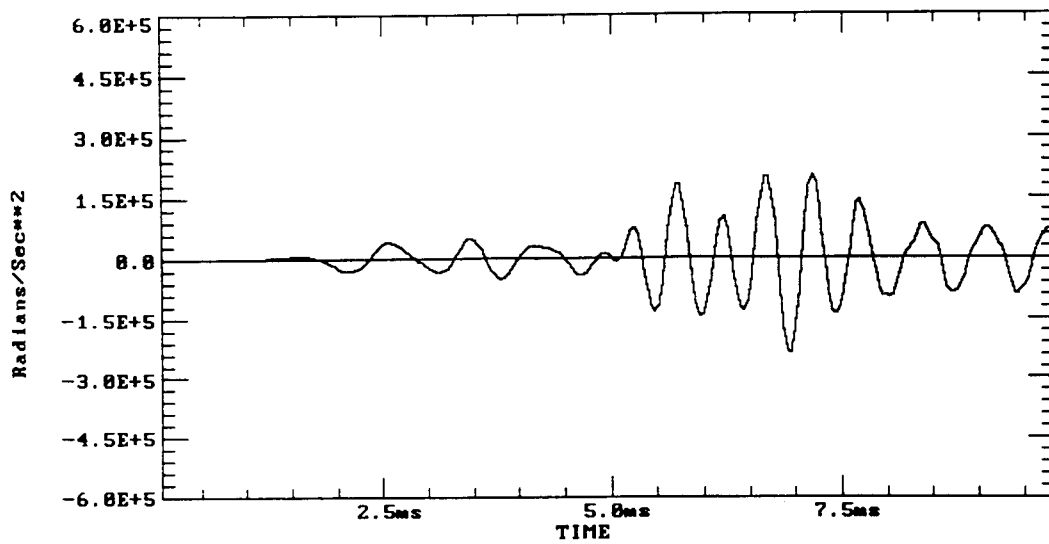


Figure C-9. Case 2 angular acceleration from Task B gun insulator centerline.

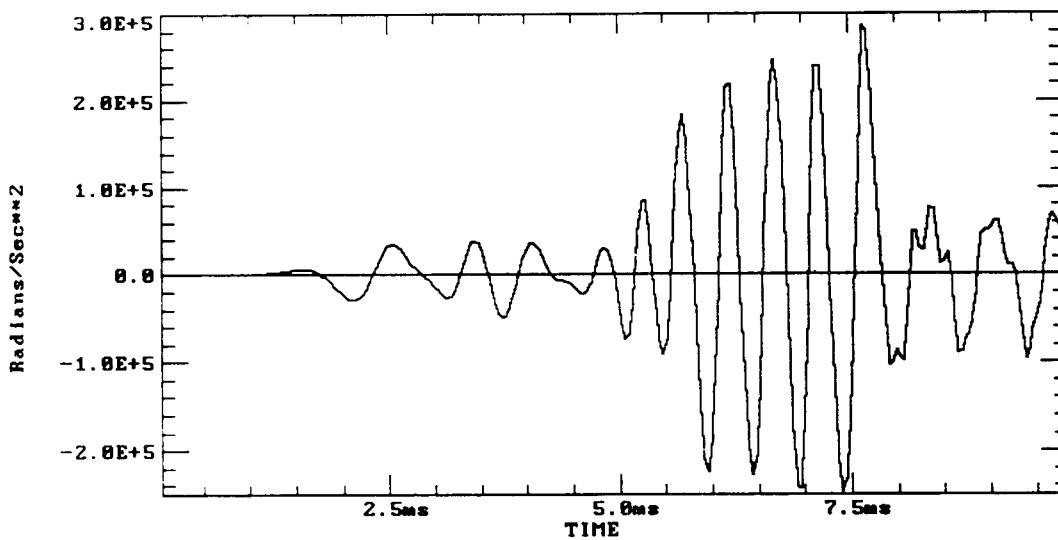


Figure C-10. Case 3 angular acceleration from Task B gun insulator centerline.

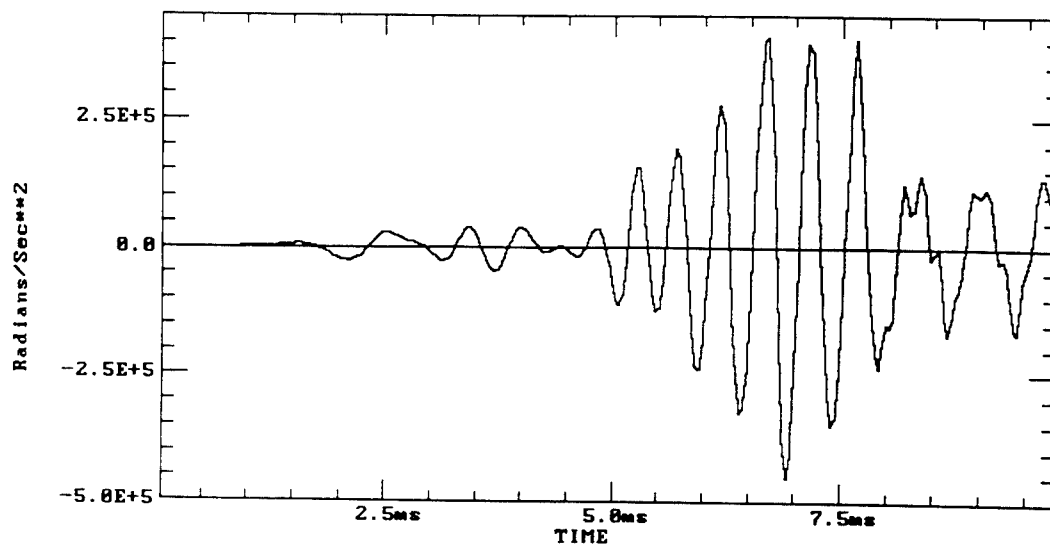


Figure C-11. Case 4 angular acceleration from Task B gun insulator centerline.

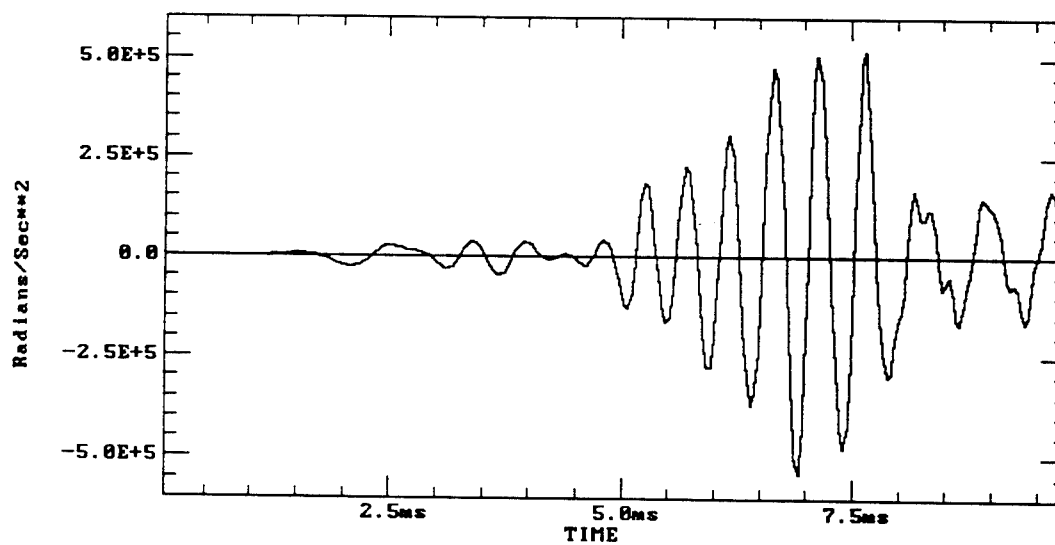


Figure C-12. Case 5 angular acceleration from Task B gun insulator centerline.

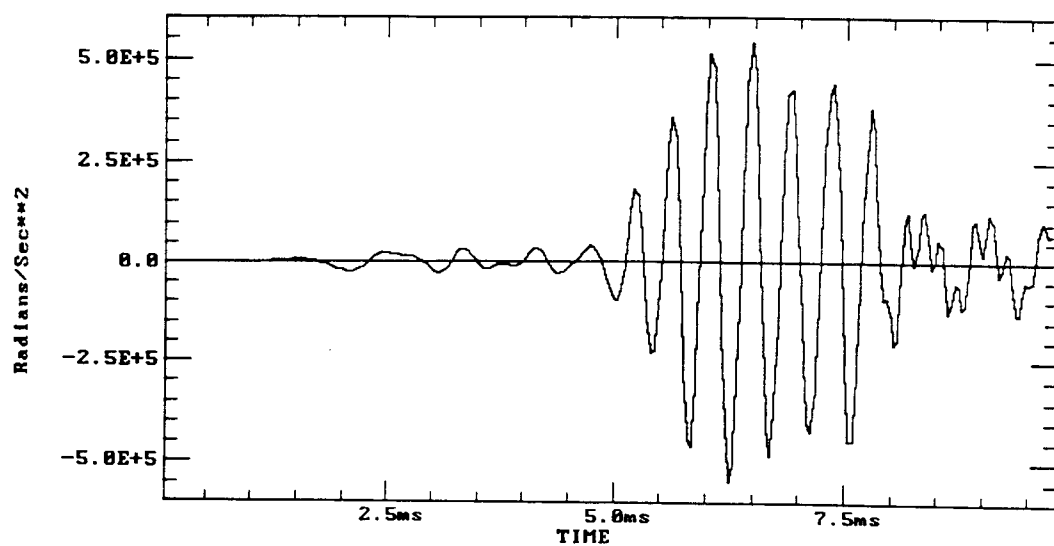


Figure C-13. Case 6 angular acceleration from Task B gun insulator centerline.

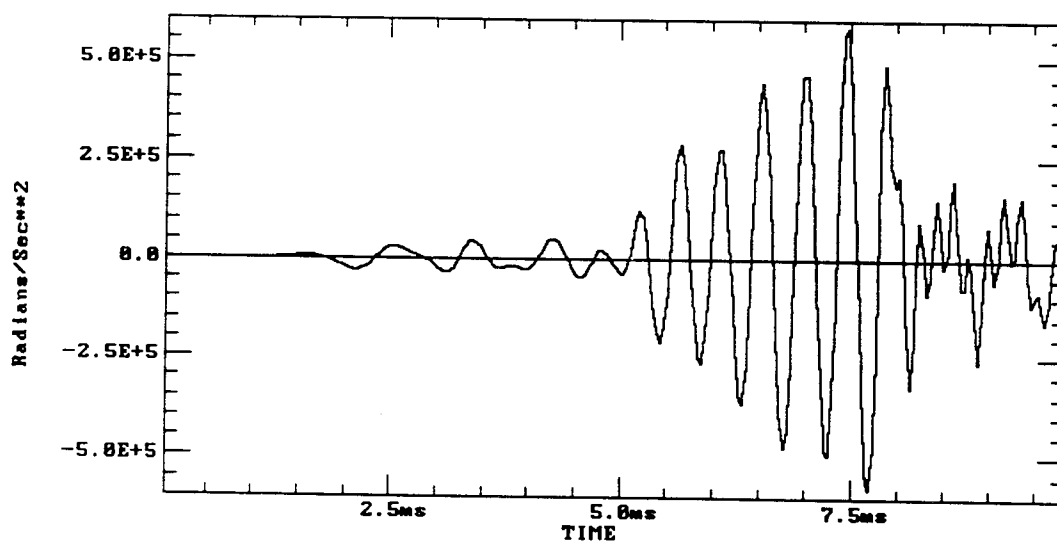


Figure C-14. Case 7 angular acceleration from Task B gun insulator centerline.

INTENTIONALLY LEFT BLANK.

APPENDIX D:  
TRANSVERSE ACCELERATION PLOTS FOR TASK C GUN

INTENTIONALLY LEFT BLANK.

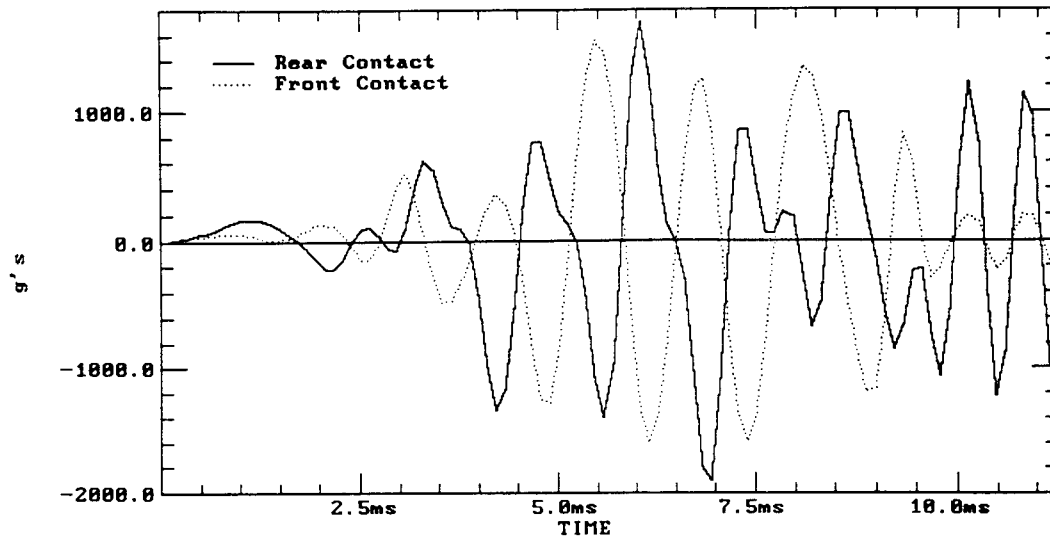


Figure D-1. Case 1 transverse acceleration from Task C gun - rail centerline.

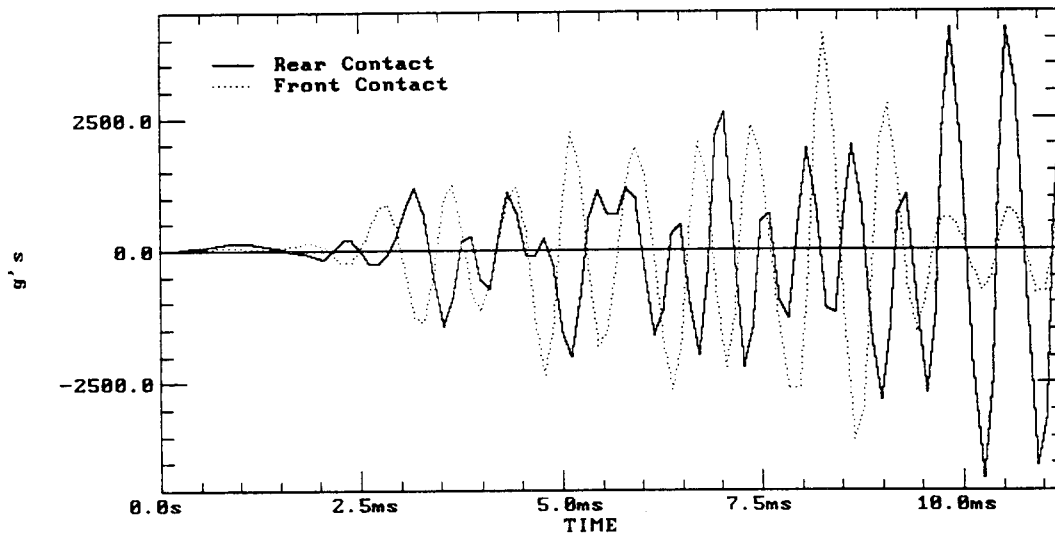


Figure D-2. Case 2 transverse acceleration from Task C gun - rail centerline.

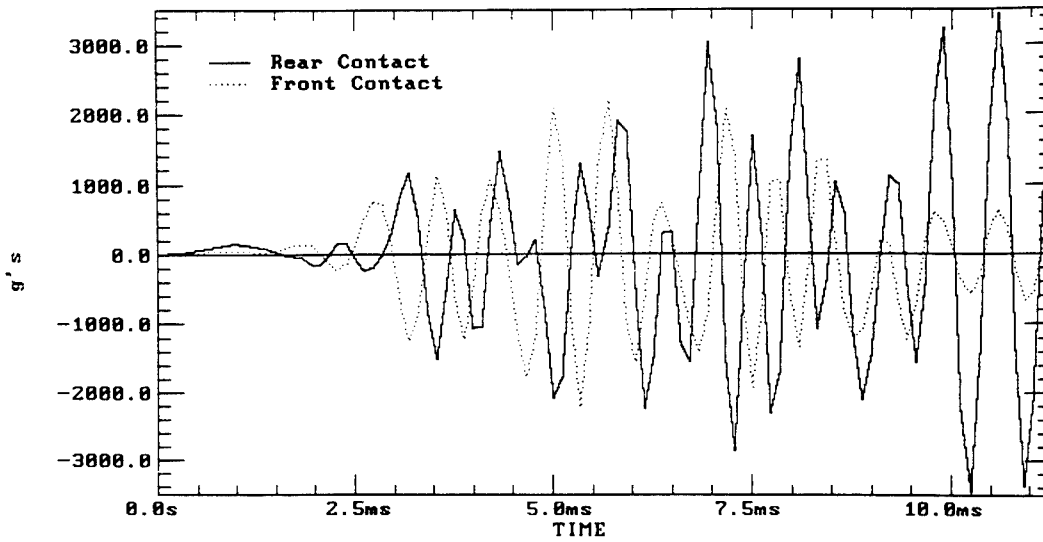


Figure D-3. Case 3 transverse acceleration from Task C gun - rail centerline.

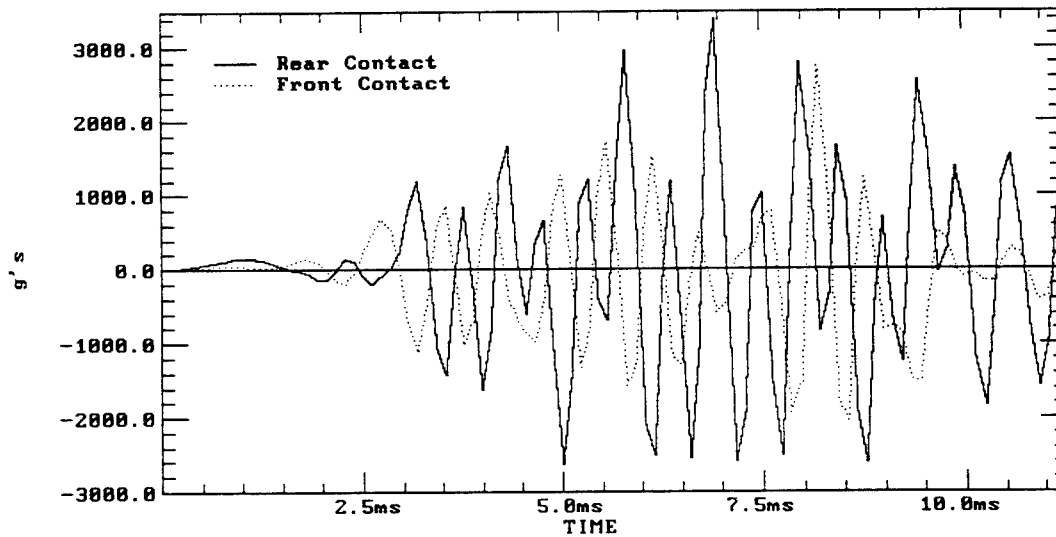


Figure D-4. Case 4 transverse acceleration from Task C gun - rail centerline.



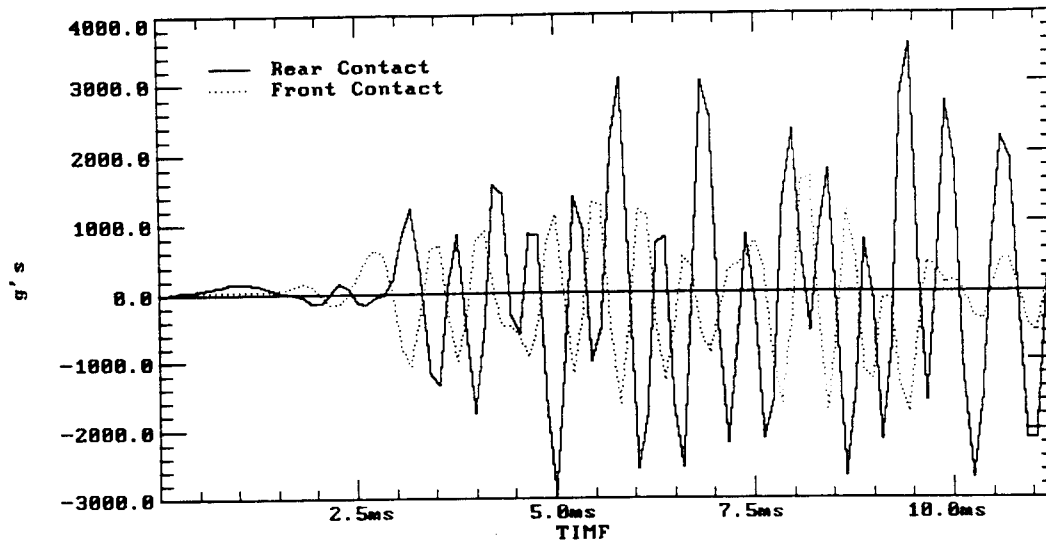


Figure D-5. Case 5 transverse acceleration from Task C gun - rail centerline.

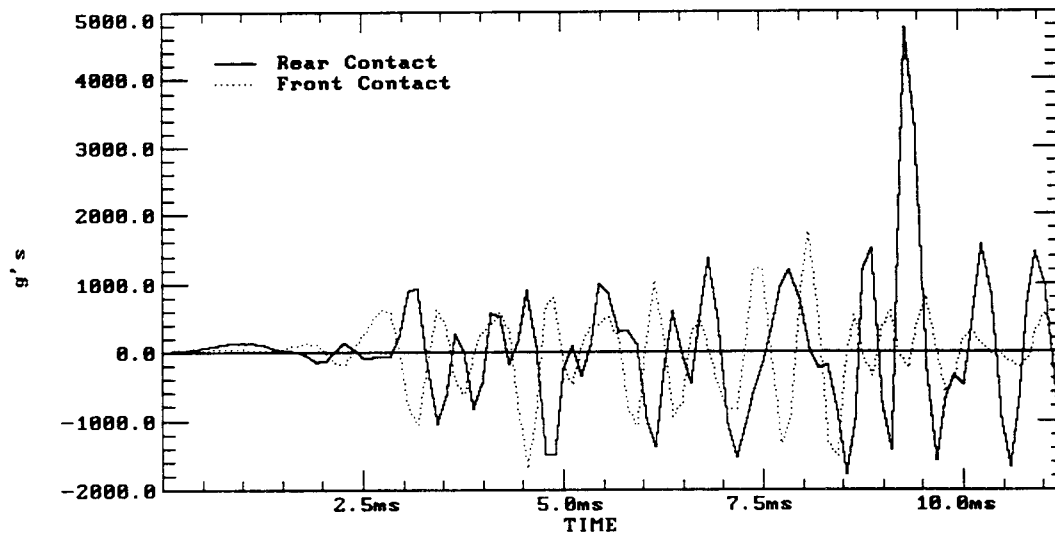


Figure D-6. Case 6 transverse acceleration from Task C gun - rail centerline.

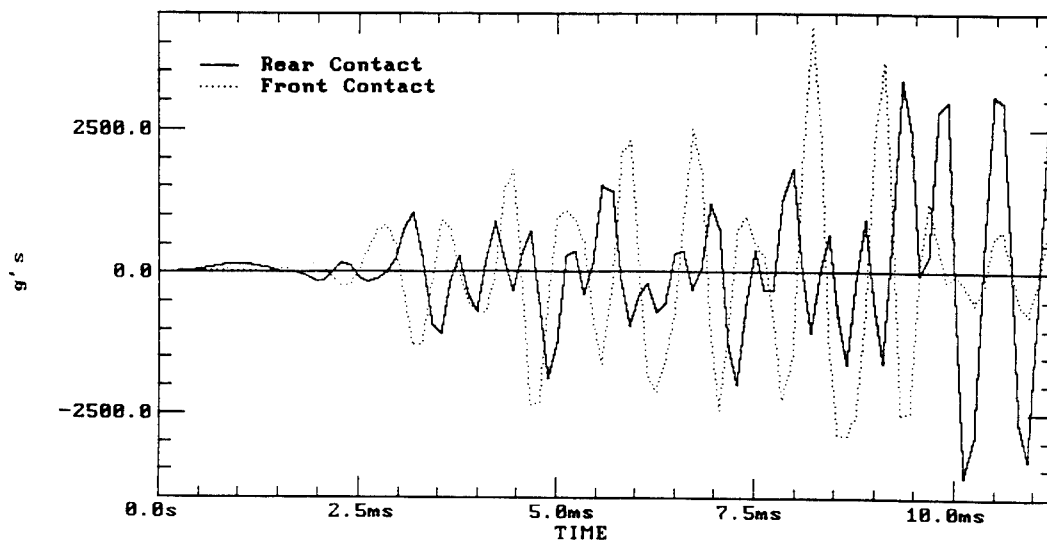


Figure D-7. Case 7 transverse acceleration from Task C gun - rail centerline.

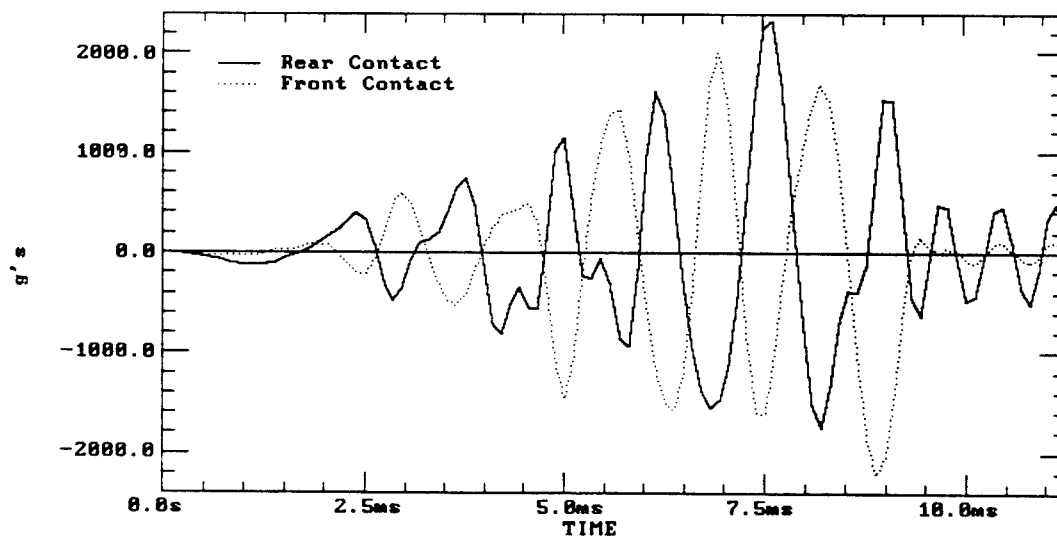


Figure D-8. Case 1 transverse acceleration from Task C gun insulator centerline.

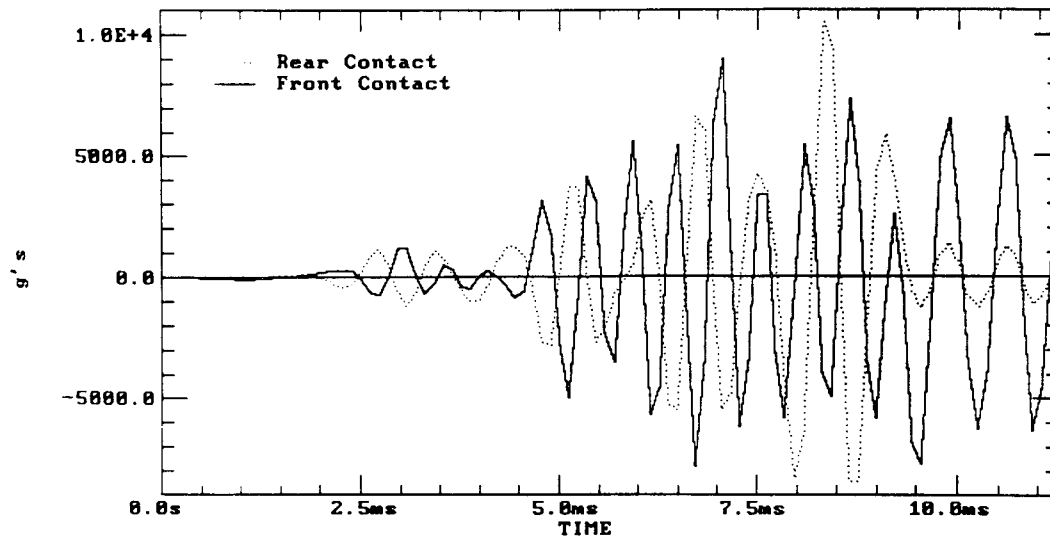


Figure D-9. Case 2 transverse acceleration from Task C gun insulator centerline.

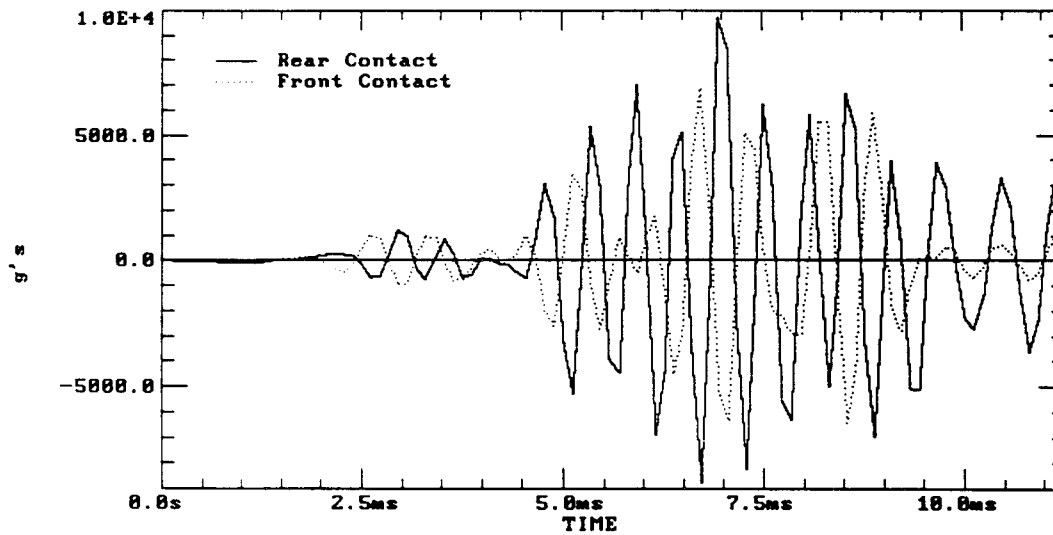


Figure D-10. Case 3 transverse acceleration from Task C gun insulator centerline.

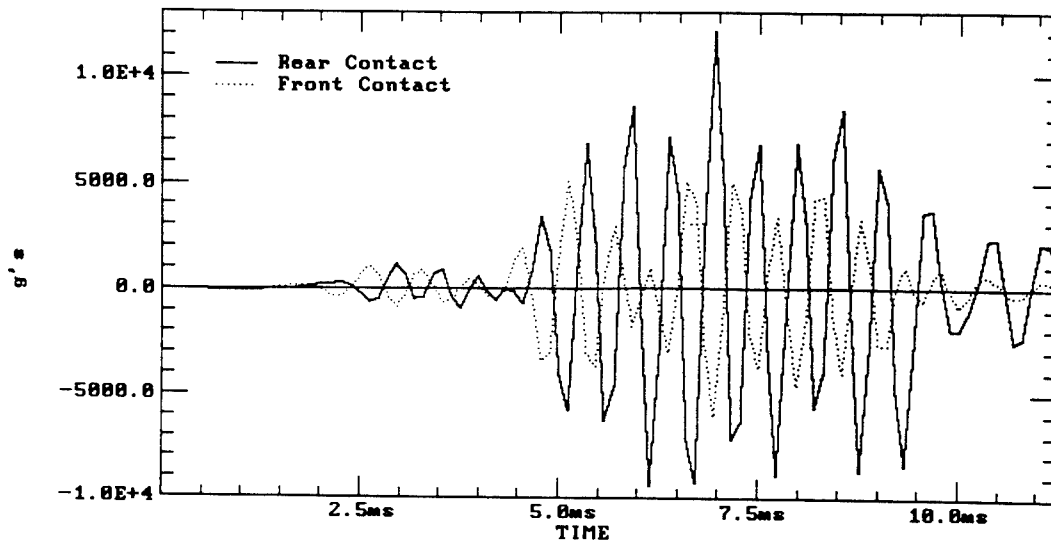


Figure D-11. Case 4 transverse acceleration from Task C gun insulator centerline.

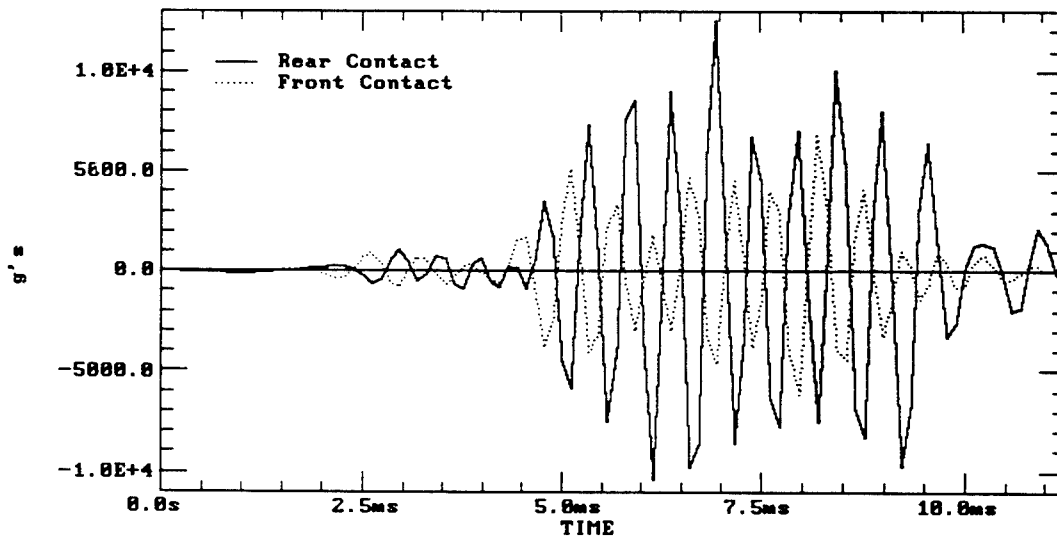


Figure D-12. Case 5 transverse acceleration from Task C gun insulator centerline.

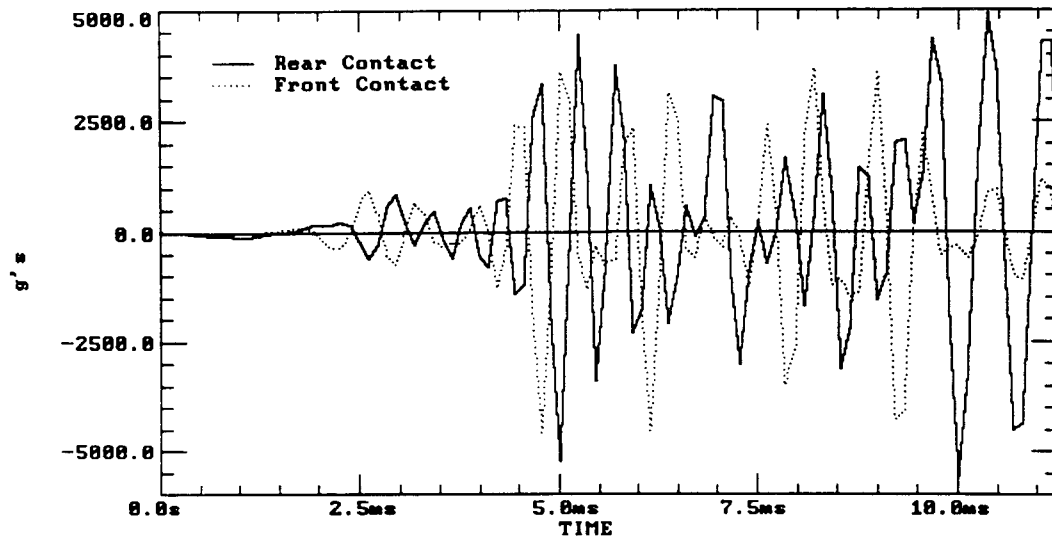


Figure D-13. Case 6 transverse acceleration from Task C gun insulator centerline.

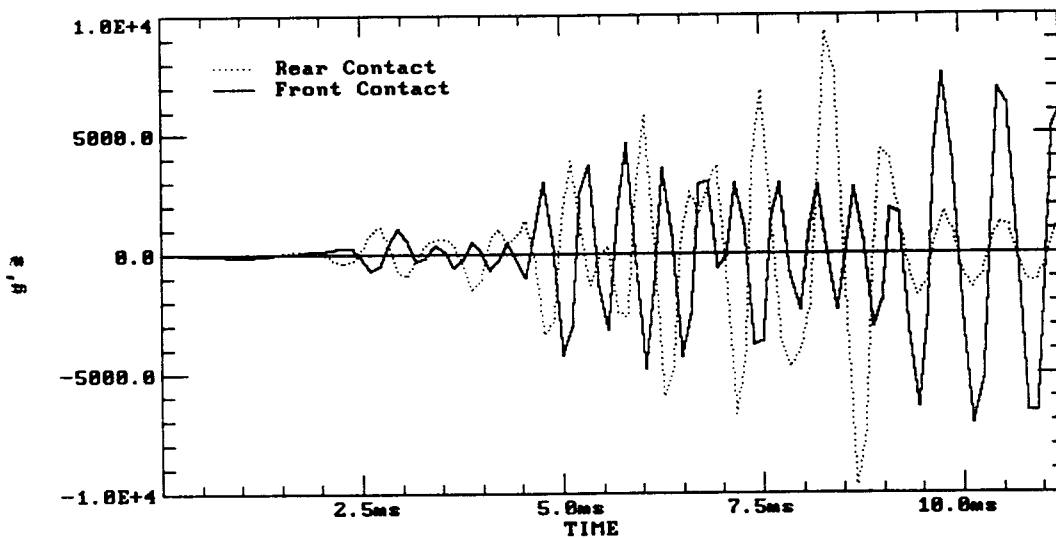


Figure D-14. Case 7 transverse acceleration from Task C gun insulator centerline.

INTENTIONALLY LEFT BLANK.

APPENDIX E:  
ANGULAR ACCELERATION PLOTS FOR TASK C GUN

INTENTIONALLY LEFT BLANK.



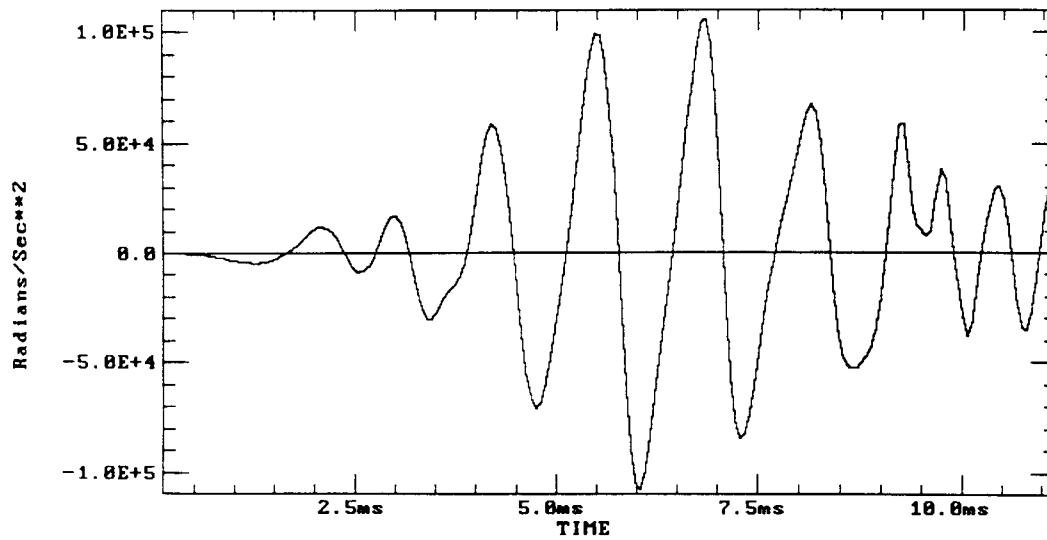


Figure E-1. Case 1 angular acceleration from Task C gun - rail centerline.

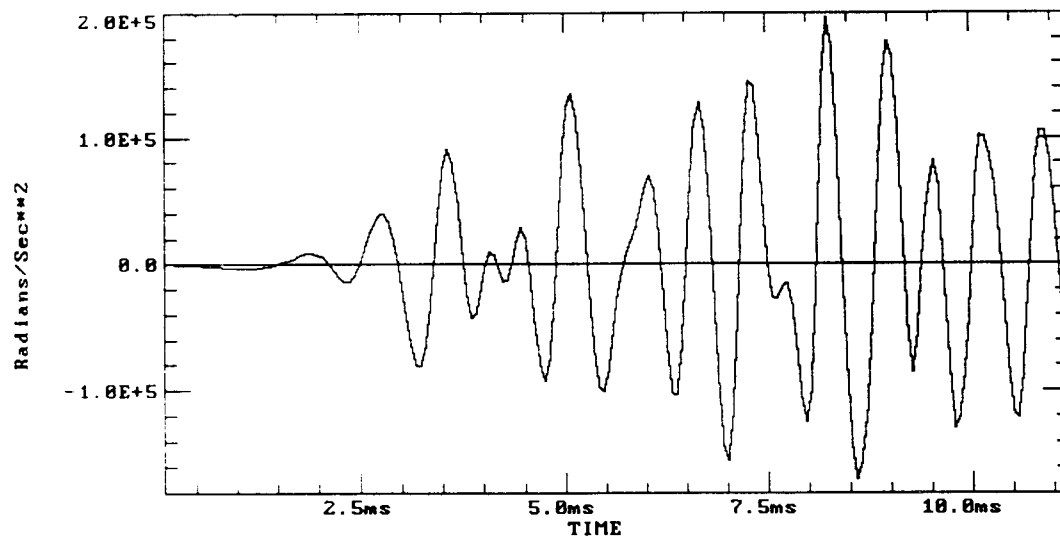


Figure E-2. Case 2 angular acceleration from Task C gun - rail centerline.

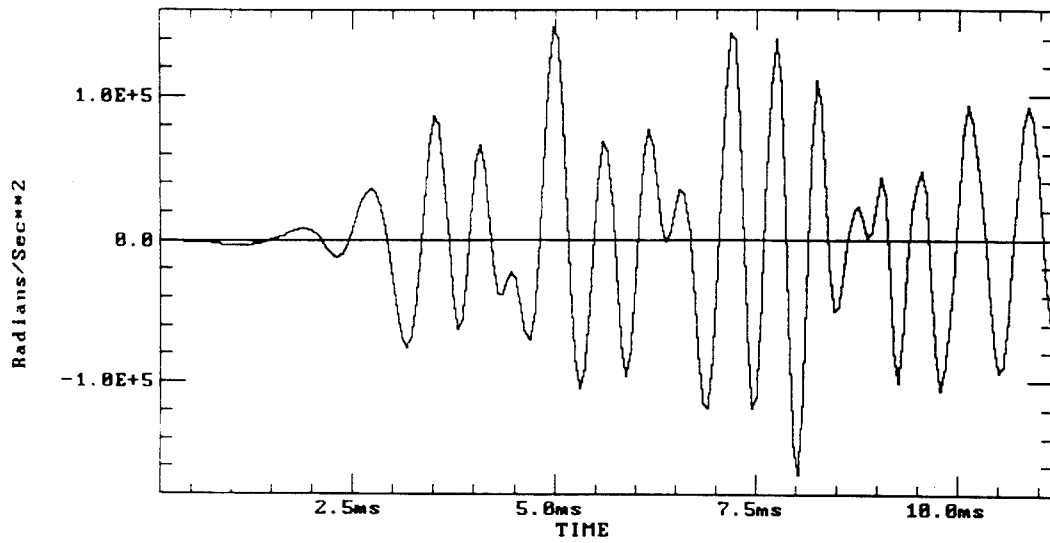


Figure E-3. Case 3 angular acceleration from Task C gun - rail centerline.

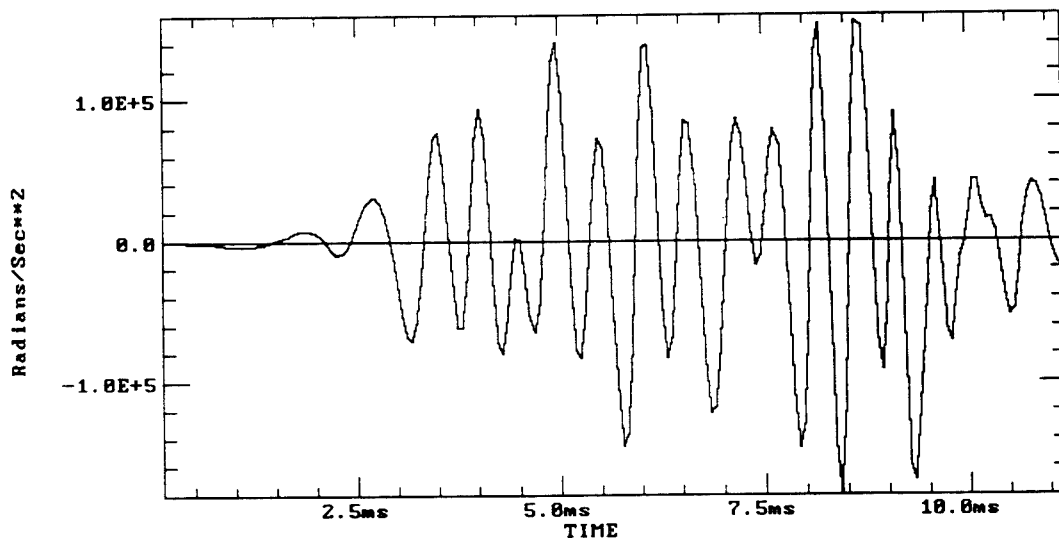


Figure E-4. Case 4 angular acceleration from Task C gun - rail centerline.

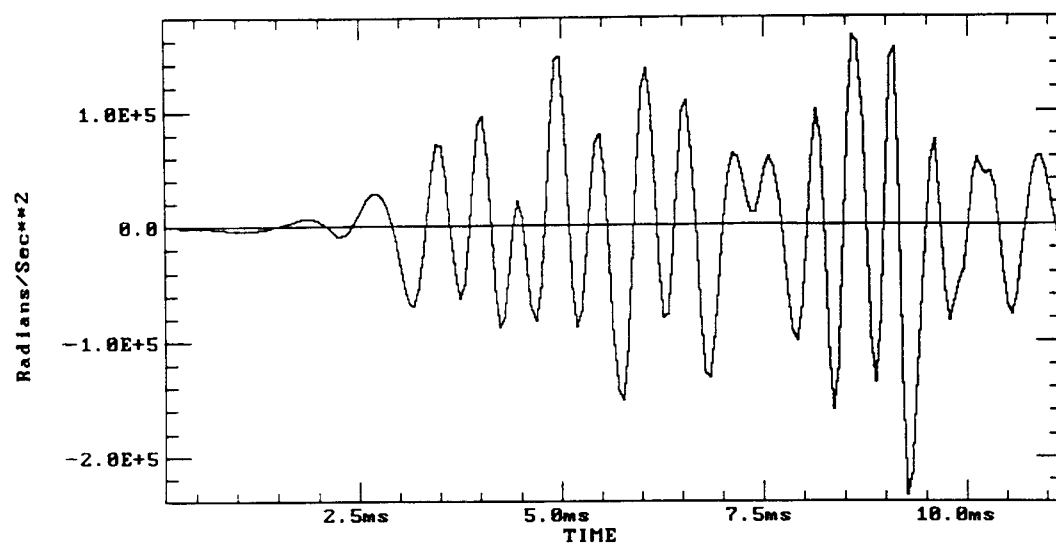


Figure E-5. Case 5 angular acceleration from Task C gun - rail centerline.

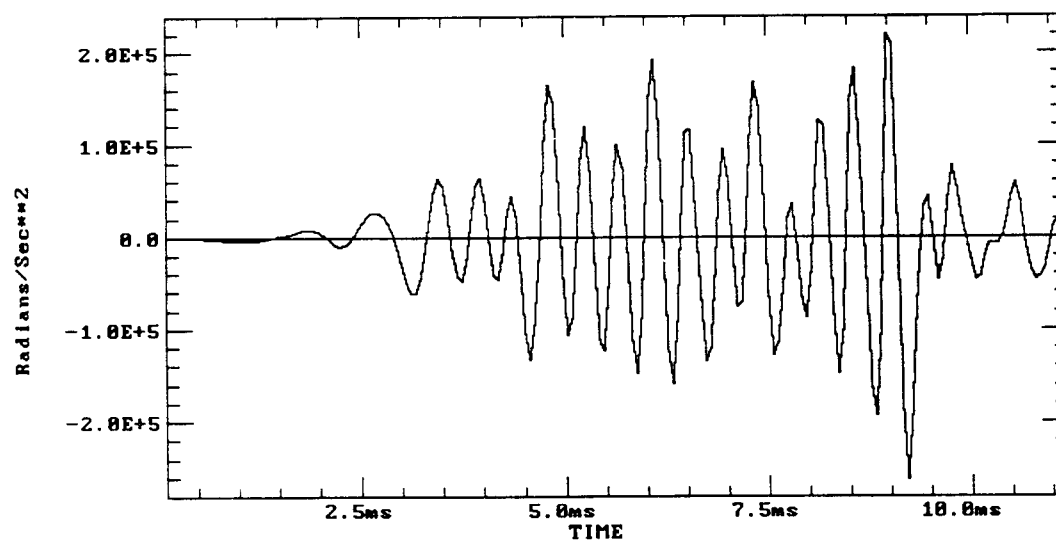


Figure E-6. Case 6 angular acceleration from Task C gun - rail centerline.

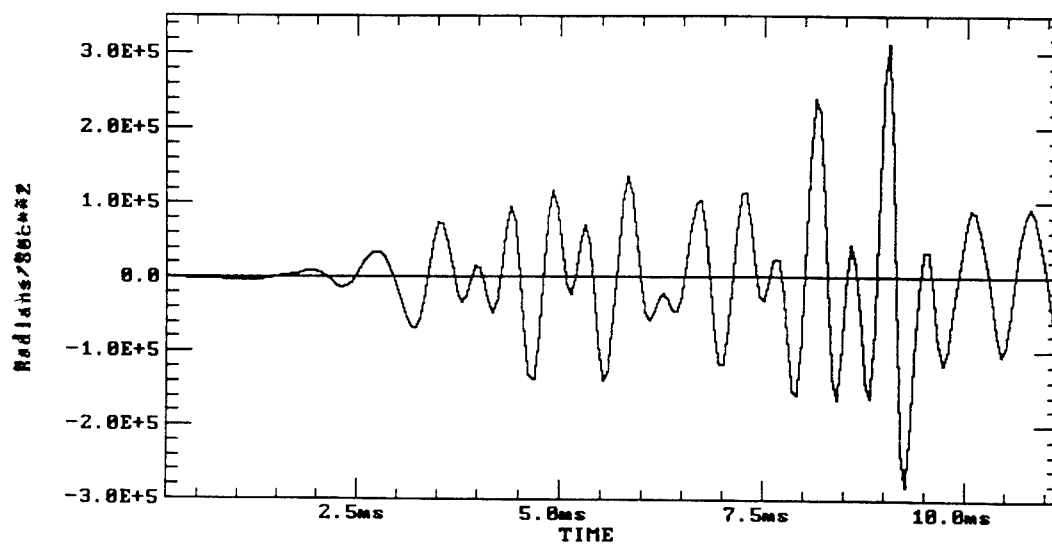


Figure E-7. Case 7 angular acceleration from Task C gun - rail centerline.

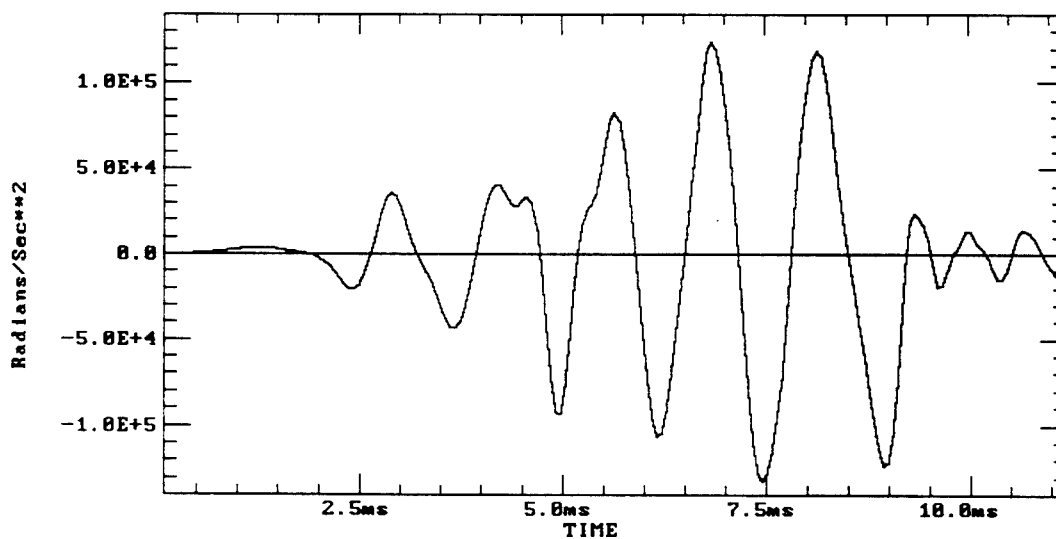


Figure E-8. Case 1 angular acceleration from Task C gun insulator centerline.

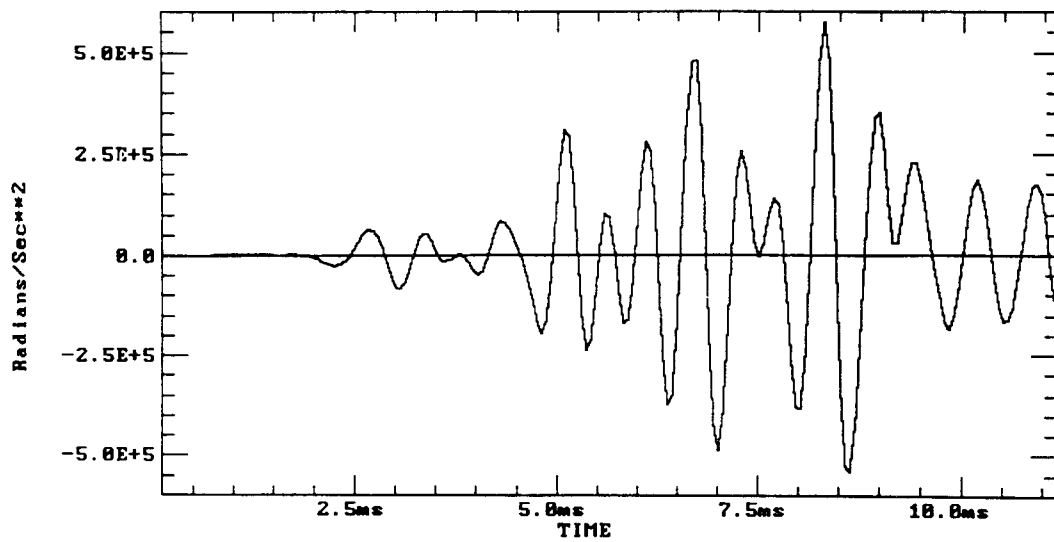


Figure E-9. Case 2 angular acceleration from Task C gun insulator centerline.

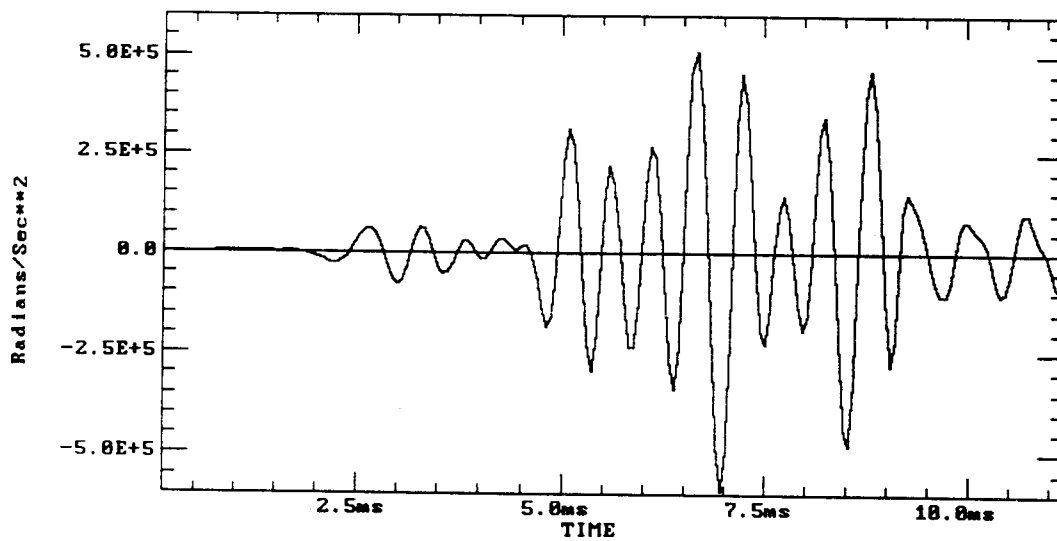


Figure E-10. Case 3 angular acceleration from Task C gun insulator centerline.

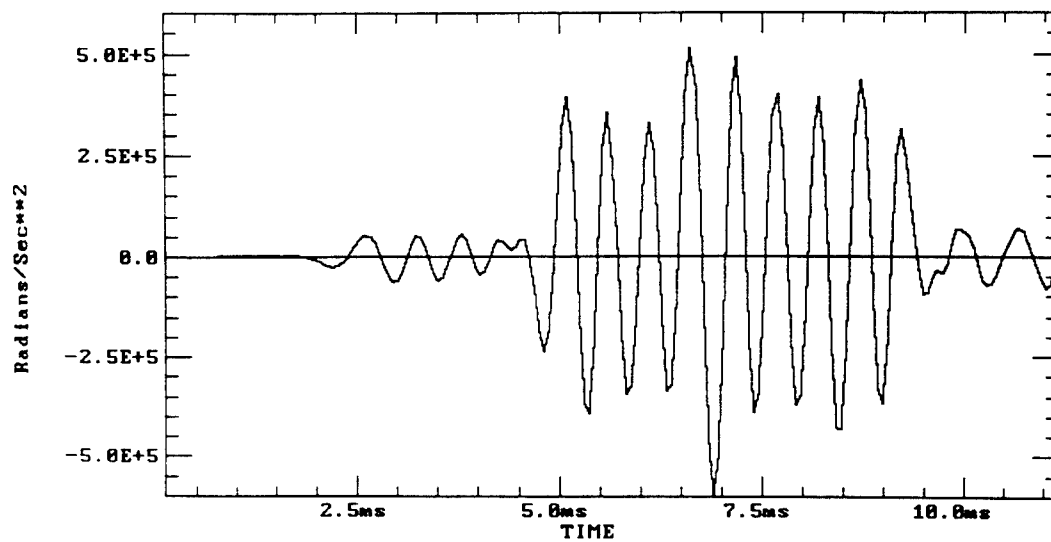


Figure E-11. Case 4 angular acceleration from Task C gun insulator centerline.

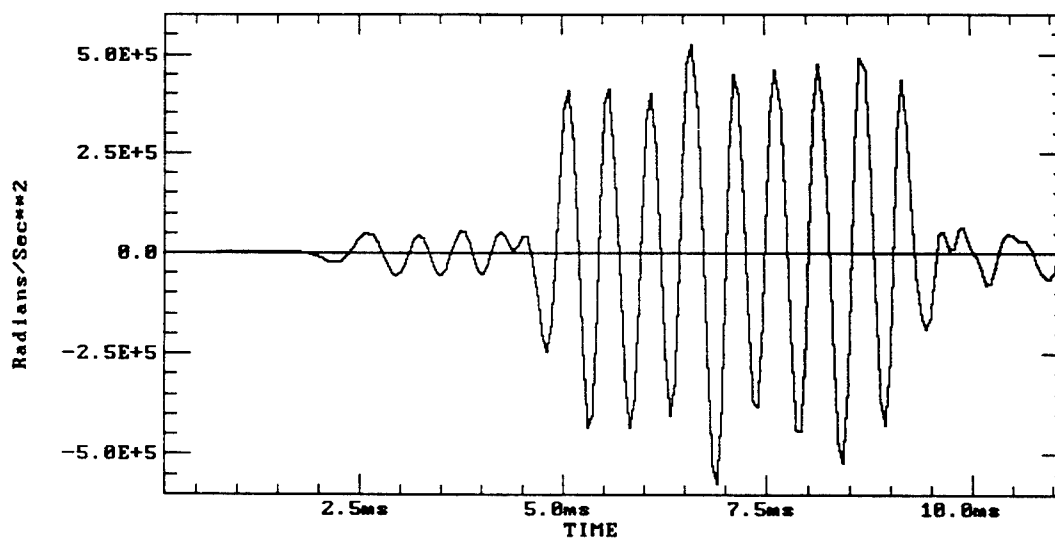


Figure E-12. Case 5 angular acceleration from Task C gun insulator centerline.

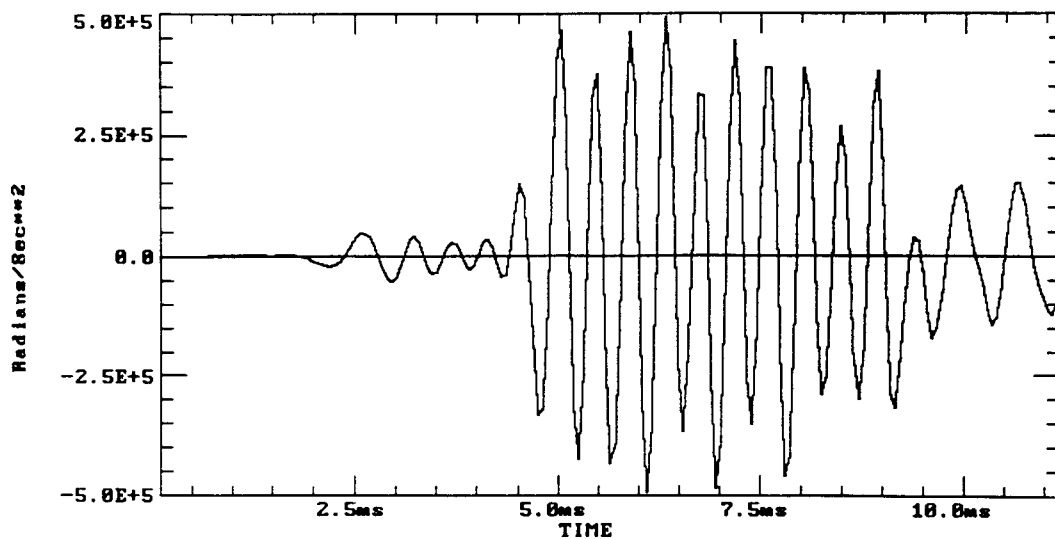


Figure E-13. Case 6 angular acceleration from Task C gun insulator centerline.

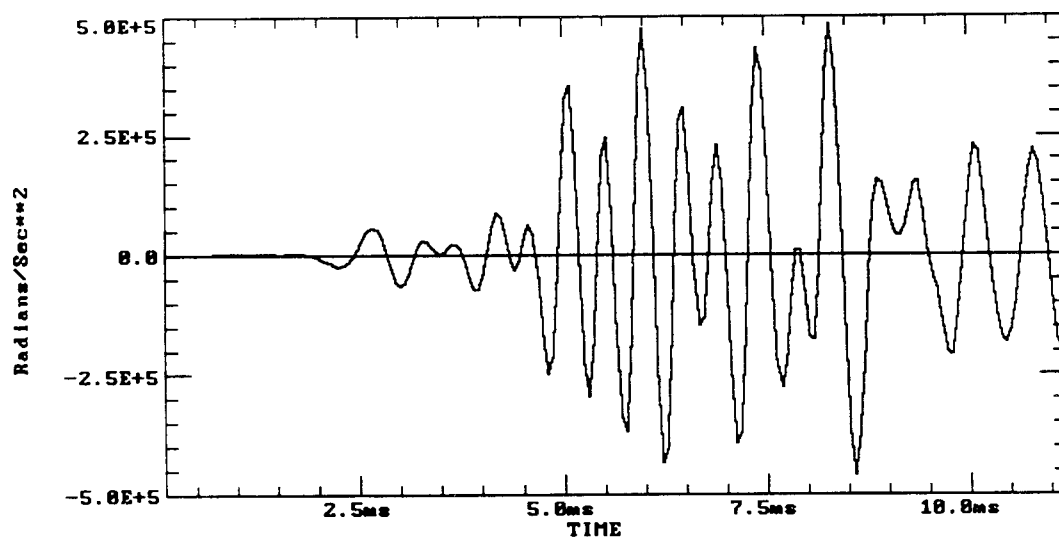


Figure E-14. Case 7 angular acceleration from Task C gun insulator centerline.

INTENTIONALLY LEFT BLANK.



NO. OF  
COPIES

ORGANIZATION

2 ADMINISTRATOR  
ATTN DTIC DDA  
DEFENSE TECHNICAL INFO CTR  
CAMERON STATION  
ALEXANDRIA VA 22304-6145

1 DIRECTOR  
ATTN AMSRL OP SD TA  
US ARMY RESEARCH LAB  
2800 POWDER MILL RD  
ADELPHI MD 20783-1145

3 DIRECTOR  
ATTN AMSRL OP SD TL  
US ARMY RESEARCH LAB  
2800 POWDER MILL RD  
ADELPHI MD 20783-1145

1 DIRECTOR  
ATTN AMSRL OP SD TP  
US ARMY RESEARCH LAB  
2800 POWDER MILL RD  
ADELPHI MD 20783-1145

ABERDEEN PROVING GROUND

5 DIR USARL  
ATTN AMSRL OP AP L (305)

| <u>NO. OF<br/>COPIES</u> | <u>ORGANIZATION</u>  |
|--------------------------|--|
| 1                        | HQDA SARD TT DR F MILTON<br>WASH DC 20310-0103   |
| 1                        | HQDA SARD TT MR J APPEL<br>WASH DC 20310-0103  |
| 11                       | DIRECTOR<br>ATTN SMCAR CCB<br>C KITCHENS<br>J KEANE<br>T ALLEN<br>J VASILAKIS<br>G FRIAR<br>T SIMKINS<br>V MONTVORI<br>J WRZOCCHALSKI<br>G D'ANDREA<br>R HASENBEIN<br>SMCAR CCB R S SOPOK<br>BENET LABORATIES<br>WATERVLIET NY 12189 |
| 1                        | CDR WATERVLIET ARSNL<br>ATTN SMCWV QAE Q C HOWD<br>BLDG 44<br>WATERVLIET NY 12189-4050   |
| 1                        | CDR WATERVLIET ARSNL<br>ATTN SMCWV SPM T MCCLOSKEY<br>BLDG 25 3<br>WATERVLIET NY 12189-4050  |
| 5                        | CDR US ARMY ARDEC<br>ATTN SMCAR CCH T<br>S MUSALLI<br>P CHRISTIAN<br>K FEHSAL<br>N KRASNOW<br>R CARR<br>PCTNY ARSNL NJ 07806-5000  |
| 1                        | CDR US ARMY ARDEC<br>ATTN SMCAR CCH V E FENNELL<br>PCTNY ARSNL NJ 07806-5000   |
| 1                        | CDR US ARMY ARDEC<br>ATTN SMCAR CCH J DELORENZO<br>PCTNY ARSNL NJ 07806-5000   |
| 1                        | CDR US ARMY ARDEC<br>ATTN SMCAR CC J HEDDERICH<br>PCTNY ARSNL NJ 07806-5000  |

| <u>NO. OF<br/>COPIES</u> | <u>ORGANIZATION</u>   |
|--------------------------|---|
| 1                        | CDR US ARMY ARDEC<br>ATTN SMCAR CCH P J LUTZ<br>PCTNY ARSNL NJ 07806-5000   |
| 3                        | CDR US ARMY ARDEC<br>ATTN SMCAR TD<br>R PRICE<br>V LINDER<br>T DAVIDSON<br>PCTNY ARSNL NJ 07806-5000  |
| 1                        | CDR PBMA<br>ATTN AMSMC PBM K<br>PCTNY ARSNL NJ 07806-5000   |
| 1                        | CDR USABRDC<br>ATTN STRBE JBC C KOMINOS<br>FORT BELVOIR VA 22060-5606   |
| 2                        | CDR US ARMY MICOM<br>ATTN AMSMI RD W MCCORKLE<br>AMSMI RD ST P DOYLE<br>REDSTONE ARSNL AL 35898   |
| 2                        | CDR US ARMY ARDEC<br>ATTN SMCAR CCL FA<br>H MOORE<br>B SCHLENNER<br>BLDG 65N<br>PCTNY ARSNL NJ 07806-5000   |
| 2                        | CDR US ARMY ARDEC<br>ATTN SMCAR FSA M<br>D DEMELLA<br>F DIORIO<br>PCTNY ARSNL NJ 07806-5000   |
| 1                        | CDR US ARMY ARDEC<br>ATTN SMCAR FSA C SPINELLI<br>PCTNY ARSNL NJ 07806-5000   |
| 7                        | CDR US ARMY ARDEC<br>ATTN SMCAR FSE<br>T GORA<br>E ANDRICOPOULOS<br>B KNUTELSKY<br>A GRAF<br>J BENNETT<br>C DUNHAM<br>R BROGNARA<br>PCTNY ARSNL NJ 07806-5000 |

| <u>NO. OF<br/>COPIES</u> | <u>ORGANIZATION</u>  |
|--------------------------|--|
| 3                        | PM AFAS<br>ATTN COL NAPOLIELLO<br>LTC A ELLIS<br>G DELCOCO<br>PCTNY ARSNL NJ 07806 5000                            |
| 1                        | CDR WATERVLIET ARSNL<br>ATTN SMCWV QA QS K INSCO<br>WATERVLIET NY 12189-4050                                       |
| 2                        | PM SADARM<br>PCTNY ARSNL NJ 07806-5000   |
| 2                        | PM TMAS<br>ATTN SFAE AR TMA<br>COL HARTLINE<br>C KIMKER<br>PCTNY ARSNL NJ 07806-5000                               |
| 2                        | PM TMAS<br>ATTN SFAE AR TMA MD<br>H YUEN<br>J MCGREEN<br>PCTNY ARSNL NJ 07806-5000                                 |
| 2                        | PM TMAS<br>ATTN SFAE AR TMA MS<br>R JOINSON<br>D GUZIEWICZ<br>PCTNY ARSNL NJ 07806-5000                            |
| 1                        | PM TMAS<br>ATTN SFAE AR TMA MP W LANG<br>PCTNY ARSNL NJ 07806-5000   |
| 1                        | DIR USARL<br>ATTN AMSRL CP CA D SNIDER<br>2800 POWDER MILL ROAD<br>ADELPHI MD 20783                                |
| 2                        | PEO ARMAMENTS<br>ATTN SFAE AR PM<br>D ADAMS<br>T MCWILLIAMS<br>PCTNY ARSNL NJ 07806-5000                           |
| 2                        | US ARMY RESEARCH OFFICE<br>ATTN ANDREW CROWSON<br>AMXRO MCS J CHANDRA<br>PO BOX 12211<br>RSRH TRI PK NC 27709-2211 |

| <u>NO. OF<br/>COPIES</u> | <u>ORGANIZATION</u>   |
|--------------------------|---|
| 2                        | NASA LANGLEY RSRCH CTR<br>MAIL STOP 266<br>ATTN AMSRL VS W ELBER<br>AMSRL VS S F BARTLETT JR<br>HAMPTON VA 23681-0001   |
| 1                        | CDR<br>ATTN AFWAML R KIM<br>WRIGHT PATTERSON AFB<br>DAYTON OH 45433   |
| 2                        | CDR ARPA<br>ATTN J KELLY<br>B WILCOX<br>3701 N FAIRFAX DR<br>ARLINGTON VA 22203-1714  |
| 6                        | DIR USARL<br>ATTN AMSRL MA P<br>L JOHNSON<br>B HALPIN<br>T CHOU<br>AMSRL MA PA<br>D GRANVILLE<br>W HASKELL<br>AMSRL MA MA G HAGNAUER<br>ARSNL STREET<br>WATERTOWN MA 02172-0001 |
| 1                        | NAVAL RESEARCH LABORATORY<br>CODE 6383<br>ATTN I WOLOCK<br>WASH DC 20375-5000   |
| 1                        | OFFICE OF NAVAL RESEARCH<br>MECH DIV CODE 1132SM<br>ATTN YAPA RAJAPAKSE<br>ARLINGTON VA 22217   |
| 2                        | DAVID TAYLOR RESEARCH CENTER<br>ATTN R ROCKWELL<br>W PHYLLAIER<br>BETHESDA MD 20054-5000  |
| 1                        | DAVID TAYLOR RESEARCH CENTER<br>SHIP STRUCTURES AND PROTECTION DEPT<br>ATTN J CORRADO CODE 1702<br>BETHESDA MD 20084  |

| <u>NO. OF<br/>COPIES</u> | <u>ORGANIZATION</u>   |
|--------------------------|---|
| 4                        | DIR LLNL<br>ATTN R CHRISTENSEN<br>S DETERESA<br>W FENG<br>F MAGNESS<br>PO BOX 808<br>LIVERMORE CA 94550   |
| 2                        | BATTELLE PNL<br>ATTN M SMITH<br>M C C BAMPTON<br>PO BOX 999<br>RICHLAND WA 99352  |
| 6                        | DIR SNL<br>APLD MECH DEPT DIV 8241<br>ATTN C ROBINSON<br>G BENEDETTI<br>W KAWAHARA<br>K PERANO<br>D DAWSON<br>P NIELAN<br>PO BOX 969<br>LIVERMORE CA 94550-0096 |
| 1                        | DIR LANL<br>ATTN D RABERN<br>MEE 13 MAIL STOP J 576<br>PO BOX 1633<br>LOS ALAMOS NM 87545   |
| 1                        | DREXEL UNIVERSITY<br>ATTN ALBERT SD WANG<br>32ND AND CHESTNUT STS<br>PHILADELPHIA PA 19104  |
| 2                        | NORTH CAROLINA STATE UNIV<br>CIVIL ENGR DEPT<br>ATTN W RASDORF<br>L SPAINHOUR<br>PO BOX 7908<br>RALEIGH NC 27696-7908   |
| 1                        | PENNSYLVANIA STATE UNIV<br>ATTN DAVID W JENSEN<br>223 N HAMMOND<br>UNIVERSITY PARK PA 16802   |
| 1                        | PENNSYLVANIA STATE UNIV<br>ATTN RICHARD MCNITT<br>227 HAMMOND BLDG<br>UNIVERSITY PARK PA 16802  |

| <u>NO. OF<br/>COPIES</u> | <u>ORGANIZATION</u>   |
|--------------------------|---|
| 1                        | PENNSYLVANIA STATE UNIV<br>ATTN RENATA S ENGEL<br>245 HAMMOND BUILDING<br>UNIVERSITY PARK PA 16801                                      |
| 1                        | STANFORD UNIV<br>DEPT OF AERONAUTICS AND<br>AEROBALLISTICS DURANT BUILDING<br>ATTN S TSAI<br>STANFORD CA 94305                          |
| 1                        | THE UNIV OF TEXAS AT AUSTIN<br>CTR FOR ELECTROMECHANICS<br>ATTN J PRICE<br>10100 BURNET ROAD<br>AUSTIN TX 78758-4497                    |
| 2                        | VIRGINIA POLYTECHNICAL INSTITUTE<br>AND STATE UNIV DEPT OF ESM<br>ATTN M W HYER<br>K L REIFSNIDER<br>BLACKSURG VA 24061-0219            |
| 2                        | UNIV OF DAYTON RSCH INSTITUTE<br>ATTN R Y KIM<br>A K ROY<br>300 COLLEGE PARK AVE<br>DAYTON OH 45469-0168                                |
| 1                        | UNIV OF DAYTON<br>ATTN J M WHITNEY<br>300 COLLEGE PARK AVE<br>DAYTON OH 45469-0240  |
| 1                        | PURDUE UNIV<br>SCHOOL OF AERO & ASTRO<br>ATTN C T SUN<br>W LAFAYETTE IN 47907-1282  |
| 1                        | UNIV OF KENTUCKY<br>ATTN L PENN<br>763 ANDERSON HALL<br>LEXINGTON KY 40506-0046   |
| 3                        | UNIV OF DELAWARE<br>CTR FOR COMPOSITE MATERIALS<br>ATTN J GILLESPE<br>B PIPES<br>M SANTARE<br>201 SPENCER LABORATORY<br>NEWARK DE 19716 |

| <u>NO. OF<br/>COPIES</u> | <u>ORGANIZATION</u>   |
|--------------------------|---|
| 1                        | UNIV OF UTAH<br>DEPT OF MECH AND INDUST ENGRNG<br><br>ATTN S SWANSON<br>SALT LAKE CITY UT 84112   |
| 1                        | UCLA<br>MANE DEPT ENGRNG IV<br>ATTN H T HAN<br>LOS ANGELES CA 90024-1597  |
| 1                        | UNIV OF ILLINOIS AT URBANA<br>CHAMPAIGN<br>NATL CTR FOR COMPOSITE MATLS RSCH<br>216 TALBOT LABORATORY<br>104 S WRIGHT ST<br>URBANA IL 61801 |
| 1                        | IAP RESEARCH INC<br>ATTN A CHILLITA<br>2763 CULVER AVE<br>DAYTON OH 45429   |
| 2                        | FMC CORPORATION<br>ATTN B GOODELL<br>B ANDERSON<br>4800 EAST RIVER RD<br>MINNEAPOLIS MN 55421-1498  |
| 1                        | ARMTEC DEFENSE PRODUCTS<br>ATTN STEVE DYER<br>85 901 AVENUE 53<br>COACHELLA CA 92236  |
| 3                        | ALLIANT TECHSYSTEMS INC<br>ATTN J BODE<br>C CANDLAND<br>K WARD<br>5901 LINCOLN DR<br>MINNEAPOLIS MN 55346-1674                              |
| 1                        | ALLIANT TECHSYSTEMS INC<br>PRECISION ARMAMENTS SYS GRP<br>7225 NORTHLAND DR<br>BROOKLYN PARK MN 55428                                       |
| 1                        | CHAMBERLAIN MFG CORP<br>R&D DIV<br>ATTN T LYNCH<br>550 ESTHER STREET<br>WATERLOO IA 50704   |

| <u>NO. OF<br/>COPIES</u> | <u>ORGANIZATION</u>   |
|--------------------------|---|
| 1                        | CUSTOM ANALYTICAL ENGRNG<br>SYSTEMS INC<br>ATTN A ALEXANDER<br>STAR ROUTE BOX 4A<br>FLINTSTONE MD 21530                     |
| 3                        | IAT<br>ATTN T KIEHNE<br>H FAIR<br>P SULLIVAN<br>4030 2 W BRAKER LANE<br>AUSTIN TX 78759                                     |
| 1                        | INTERFEROMETRICS INC<br>ATTN R LARRIVA VP<br>8150 LEESBURG PIKE<br>VIENNA VA 22100  |
| 2                        | KAMAN SCIENCES CORP<br>ATTN D ELDER<br>T HAYDEN<br>PO BOX 7463<br>COLORADO SPRINGS CO 80933                                 |
| 3                        | LORAL VUGHT SYSTEMS<br>ATTN G JACKSON<br>K COOK<br>L L HADDEN<br>1701 W MARSHALL DR<br>GRAND PRAIRIE TX 75051               |
| 2                        | OLIN CORP<br>FLINCHBAUGH DIV<br>ATTN E STEINER<br>B STEWART<br>PO BOX 127<br>RED LION PA 17356                              |
| 1                        | OLIN CORP<br>ATTN L WHITMORE<br>10101 9TH ST NORTH<br>ST PETERSBURG FL 33702  |
| 1                        | DEFENSE NUCLEAR AGENCY<br>ATTN DR R ROHR<br>INNOVATIVE CONCEPTS DIVISION<br>6801 TELEGRAPH ROAD<br>ALEXANDRIA VA 22310-3398 |

| NO. OF<br>COPIES | ORGANIZATION   |
|------------------|--|
| 1                | EXPEDITIONARY WARFARE DIV N85<br>ATTN DR FRANK SHOUP<br>2000 NAVY PENTAGON<br>WASHINGTON DC 20350-2000                             |
| 1                | OFFICE OF NAVAL RESEARCH<br>ATTN MR DAVID SIEGEL 351<br>800 N QUINCY ST<br>ARLINGTON VA 22217-5600                                 |
| 1                | NAVAL SURFACE WARFARE CENTER<br>ATTN JOSEPH H FRANCIS<br>CODE G30<br>DAHLGREN VA 22448   |
| 1                | NAVAL SURFACE WARFARE CENTER<br>ATTN JOHN FRAYSSE<br>CODE G33<br>DAHLGREN VA 22448   |
| 1                | NOESIS INC<br>ATTN ALLEN BOUTZ<br>1500 WILSON BLVD STE 1224<br>ARLINGTON VA 22209  |
| 1                | COMMANDER<br>ATTN DAVID LIESE<br>NAVAL SEA SYSTEMS COMMAND<br>2531 JEFFERSON DAVIS HWY<br>ARLINGTON VA 22242-5160                  |
| 1                | DEPT OF AEROSPACE ENGNRNG<br>ATTN DR ANTHONY J VIZZINI<br>UNIVERSITY OF MARYLAND<br>COLLEGE PARK MD 20742                          |
| 1                | DEFENSE NUCLEAR AGENCY<br>ATTN LTC JYUJI D HEWITT<br>INNOVATIVE CONCEPTS DIVISION<br>6801 TELEGRAPH RD<br>ALEXANDRIA VA 22310-3398 |
| 1                | NAVAL SURFACE WARFARE CTR<br>ATTN MARY E LACY<br>CODE D4<br>17320 DAHLGREN RD<br>DAHLGREN VA 22448-5000                            |

| NO. OF<br>COPIES | ORGANIZATION   |
|------------------|--|
|                  | <u>ABERDEEN PROVING GROUND</u>   |
| 35               | DIR USARL<br>ATTN AMSRL SL BE, CHIEF<br>AMSRL WT WC, CHIEF<br>AMSRL WT WB,<br>W D'AMICO<br>A ZIELINSKI<br>J POWELL<br>AMSRL WT TC,<br>CHIEF<br>R COATES<br>AMSRL WT TA, CHIEF<br>AMSRL-WT-PD,<br>CHIEF<br>W DRYSDALE<br>K BANNISTER<br>T BOGETTI<br>J BENDER<br>R MURRAY<br>R KIRKENDALL<br>T ERLINE<br>D HOPKINS<br>S WILKERSON<br>R KASTE<br>L BURTON<br>J TZENG<br>C JAEGER<br>AMSRL WT PA, CHIEF<br>AMSRL WT PC, CHIEF<br>AMSRL WT PB, CHIEF<br><br>AMSRL WT PD (ALC),<br>A ABRAHAMIAN<br>K BARNES<br>M BERMAN<br>H DAVISON<br>A FRYDMAN<br>T LI<br>W MCINTOSH<br>E SZYMANSKI<br>H WATKINS |

# USER EVALUATION SHEET/CHANGE OF ADDRESS

This Laboratory undertakes a continuing effort to improve the quality of the reports it publishes. Your comments/answers to the items/questions below will aid us in our efforts.

1. ARL Report Number ARL-TR-726 Date of Report April 1995
2. Date Report Received \_\_\_\_\_
3. Does this report satisfy a need? (Comment on purpose, related project, or other area of interest for which the report will be used.) \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_
4. Specifically, how is the report being used? (Information source, design data, procedure, source of ideas, etc.) \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_
5. Has the information in this report led to any quantitative savings as far as man-hours or dollars saved, operating costs avoided, or efficiencies achieved, etc? If so, please elaborate. \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_
6. General Comments. What do you think should be changed to improve future reports? (Indicate changes to organization, technical content, format, etc.) \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

## CURRENT ADDRESS

\_\_\_\_\_  
Organization

\_\_\_\_\_  
Name

\_\_\_\_\_  
Street or P.O. Box No.

\_\_\_\_\_  
City, State, Zip Code

7. If indicating a Change of Address or Address Correction, please provide the Current or Correct address above and the Old or Incorrect address below.

## OLD ADDRESS

\_\_\_\_\_  
Organization

\_\_\_\_\_  
Name

\_\_\_\_\_  
Street or P.O. Box No.

\_\_\_\_\_  
City, State, Zip Code

(Remove this sheet, fold as indicated, tape closed, and mail.)  
(DO NOT STAPLE)

---

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS


**BUSINESS REPLY MAIL**

FIRST CLASS PERMIT NO 0001,APG,MD

POSTAGE WILL BE PAID BY ADDRESSEE

DIRECTOR  
U.S. ARMY RESEARCH LABORATORY  
ATTN: AMSRL-WT-PD  
ABERDEEN PROVING GROUND, MD 21005-5066

---



NO POSTAGE  
NECESSARY  
IF MAILED  
IN THE  
UNITED STATES

